

mist eliminators


FEATURES

- achieves same high efficiency filtration as conventional downstream filters with a service life of 10+ years
- pleated glass microfiber coalescing media is 99.97% efficient with a particle removal down to 0.3 micron including coalesced liquid water and oil
- typically located after an oil lubricated compressor to provide optimum protection in the result of a catastrophic failure of the compressor's air/oil separator
- high efficiency and initial low pressure drop of less than 0.5 psig means units are utility rebate-friendly due to pleated media design v. conventional wrapped elements
- heavy duty pressure vessel built in accordance with latest edition of VIII Div 1 ASME Code
- external powder epoxy coated as standard
- zero air loss drain (shipped loose)
- serviceability without inlet & outlet disruption
- automatic drain vent ports and safety valve port included as standard
- applications include industrial, automotive and food and beverage



element reinforcement

reinforced with epoxy coated steel wire and epoxy potting compound with perforated steel for additional support

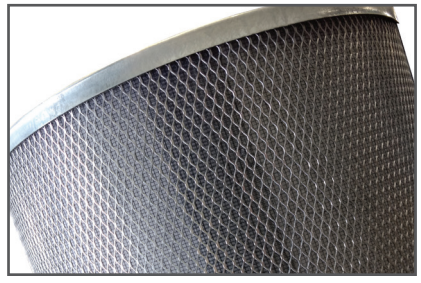

DPG as standard

differential pressure gauge mounted and piped for ease of trouble shooting



nano-purification solutions
charlotte, north carolina
united states

nano-purification solutions
new bethlehem, pennsylvania
united states

nano-purification solutions
st. catharines, ontario
canada

nano-purification solutions
gateshead, tyne and wear
united kingdom

nano-purification solutions
krefeld, germany

tel: 704.897.2182
fax: 704.897.2183
email: support@n-psi.com
web: www.n-psi.com

SPECIFICATIONS

filter model	inlet & outlet		rated flow ⁽¹⁾		dimensions (inches)			approx. weight	replacement element
	NPT/Flg	scfm	Nm ³ /h	A	B	C	lbs		
MEL 0250	2"	250	425	54	20	15.5	336	E 0250	
MEL 0500	3"	500	850	61	20	22	359	E 0500	
MEL 1000	3"	1000	1699	69	28	22.5	620	E 1000	
MEL 1250	3" Flg	1250	2124	71	28	22.5	654	E 1250	
MEL 1500	4" Flg	1500	2549	71	28	22.5	662	E 1500	
MEL 3000	4" Flg	3000	5097	84	36	29.5	1161	E 3000	
MEL 5000	6" Flg	5000	8495	90	42	29.5	2378	E 5000	

specifications

recommended operating temperature range	68 to 180°F
design operating temperature range	35 to 248°F
design operating pressure range	20 to 150 psig
initial differential pressure	less than 0.5 psig
recommended pressure differential for element change	1.0 psid
filtration performance	0.3 micron @ 99.97% efficiency
ISO air quality class (solids, water, oil)	ISO Class 2.7.3

pressure correction factors

operating pressure (psig)	20	30	40	60	80	100	120	150
correction factor	0.35	0.44	0.54	0.70	0.84	1.00	1.10	1.25

- (1) at 100 psig. For all other pressures, refer to the pressure correction factors above
- (2) for condensate drain options, consult nano
- (3) technical specifications subject to change without notice. Direct inquiries to support@n-psi.com or contact 704.897.2182

