

## NDL 3130 GF

100-240 VAC/50 or 60 Hz - 560 scfm desiccant air dryer

The nano D<sup>1|2|3</sup> modular air dryer provides clean dry air for a wide range of industrial applications. These dryers use the pressure swing adsorption principle in a modular design to dehydrate and purify your compressed air in a simple, efficient and compact package. With digital PLC controls that manage energy consumption and provide dew point monitoring, the D<sup>1|2|3</sup> modular desiccant air dryer provides substantial energy savings under various seasonal conditions for critical applications.



### general characteristics

rated capacity (scfm)*	560
regeneration air (scfm)*	112
absorbed power (kW)	0.0360
power supply (V/Ph/Hz)	100-240 VAC / 50 or 60 Hz <sup>(1)</sup>

### operating limits

design operating pressure range (psig)	58 - 145 <sup>(2)</sup>
recommended operating temperature range (°F)	35 - 100
minimum/maximum ambient temperature (°F)	35 - 122
maximum inlet temperature (°F)	122

### desiccant chambers

desiccant type	activated alumina
desiccant service with integrated after filter (kit no)	NDA 130-3

### controls/design

dryer design	PSA
controller type	PLC
NEMA rating	NEMA 1

### air circuit

air circuit connections (NPT(F))	2"
----------------------------------	----

### ISO class

ISO air quality class (water content)	class 2 (-40°F pdp)
---------------------------------------	---------------------

\*in compliance with CAGI (ADF 100) / NFPA (class H): inlet temperature 100°F, ambient temperature 100°F, inlet pressure 100 psig, pressure dew point -40°F (-94°F optional). For all other conditions, contact support@n-psi.com

### features

- c-ETL-US certification
- includes a separate F<sup>1.1</sup> M01 grade pre filter (shipped loose) and a built in 1 micron after filter
- advanced PLC controlled operation
- energy saving dew point control (ES option)
- built in reliability with a 2-year warranty
- robust modular compact aluminum design
- reliable high-performance valves
- tower equalization for constant flow and pressure
- designed for tough industrial settings
- integrated compressor synchronization function
- tower pressure gauges as standard

### advanced PLC features

- digital interface
- digital LED display
- outlet air dew point indication (with ES option)
- user programmable operating parameters
- alarm indication

(1) optional pneumatic or 24 V DC

(2) 232 psig **optional** rating for USA; 210 psig **optional** rating for Canada

nano-purification solutions  
Charlotte, North Carolina  
United States

nano-purification solutions TN  
Maryville, Tennessee  
United States

nano-purification solutions Canada  
St. Catharines, Ontario  
Canada

nano-purification solutions Ltd.  
Gateshead, Tyne and Wear  
United Kingdom

nano-purification solutions GmbH  
Erkelenz, Germany


nano-purification solutions Asia  
Singapore

Tel: 704.897.2182  
Fax: 704.897.2183  
Email: support@n-psi.com  
Web: www.n-psi.com

## technical specification

### dimensions & weight

length (in)	33.4
width (in)	15.7
height (in)	73.7
weight (lb)	548

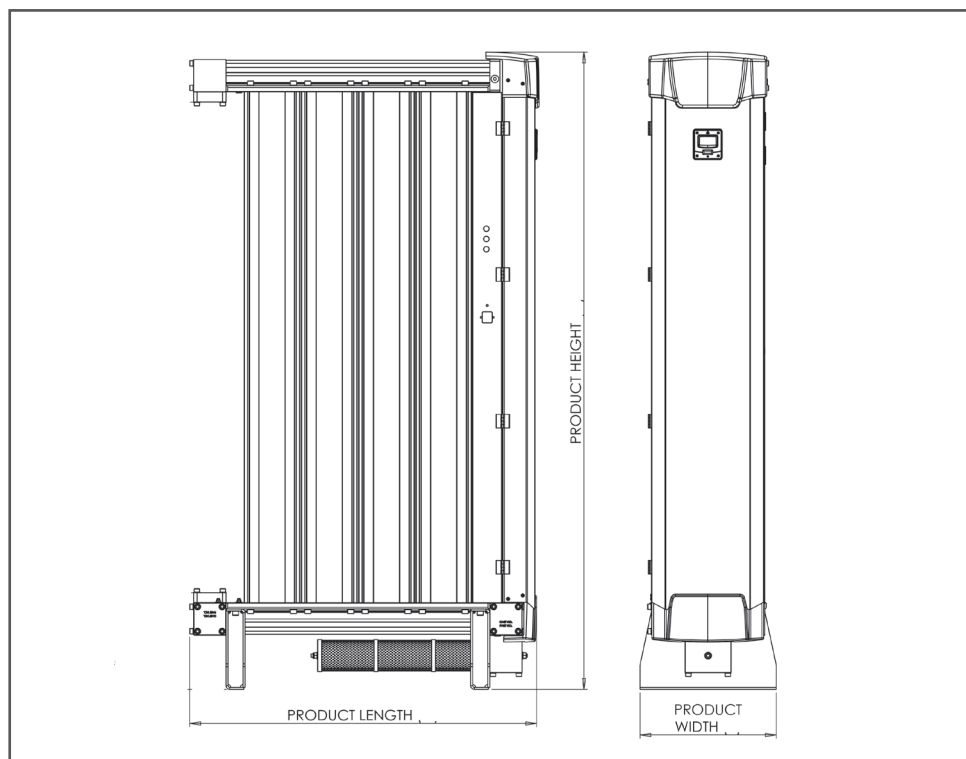

experience