

# EHA 3800

460VAC/60Hz - 3800 scfm desiccant air dryer

The nano D<sup>5</sup> twin tower externally heated desiccant air dryer provides clean dry air for a wide range of industrial applications. These dryers use an electric heater to heat a small amount of dry purge air for regeneration to increase efficiency and reduce the amount of purge air required. For consistent performance and cost-effective operation, these dryers are an excellent choice.



## general characteristics

rated capacity (scfm)*	3800
regeneration air (scfm)**	304
absorbed power (kW)	67

## operating limits

minimum/design/maximum operating pressure range (psig)	80 / 100 / 150
minimum/design/maximum ambient temperature range (°F)	38 / 100 / 120
minimum/design/maximum inlet temperature (°F)	38 / 100 / 120

## desiccant chambers

desiccant type	activated alumina
desiccant weight (lbs)	5350

## controls/design

dryer design	PSA externally heated regenerative dryer
controller type	PLC
NEMA rating	NEMA 4

## heater

absorbed power (kW)	67
---------------------	----

## air circuit

air circuit connections (NPT(F))	6"
----------------------------------	----

## ISO class

ISO air quality class (water content)	class 2 (-40°F pdp)
---------------------------------------	---------------------

\*in compliance with CAGI (ADF 100) / NFPA (class H): inlet temperature 100°F, ambient temperature 100°F, inlet pressure 100 psig, pressure dew point -40°F. For all other conditions, contact support@n-psi.com

\*\*based on a timed cycle at full flow. To decrease regeneration air consumption, please select the -ES Energy Saver option

## features

- UL/cUL compliant
- ASME U-stamped pressure vessels
- pressure vessels rated to 175 psig @ 450°F
- visual moisture indicator
- integral energy saving outlet dew point control (ES optional)
- pre- and after filters recommended
- variety of options including bypass and pre-packaged systems
- low-wattage incoloy sheathed heater

## electrical features

- PLC controller
- fiberglass cUL control panel for NEMA 4X protection class
- ETL approved electrical panel
- four-hour timed NEMA cycle with thermo-couple heater override to prevent overheating in periods of low demand
- two contactors to prevent runaway heater

nano-purification solutions llc  
charlotte, north carolina  
united states

nano-purification solutions penn  
new bethlehem, pennsylvania  
united states

nano-purification solutions  
st. catharines, ontario  
canada

nano-purification solutions ltd  
gateshead, tyne and wear  
united kingdom

nano-purification solutions GmbH  
krefeld, germany


tel: 704.897.2182  
fax: 704.897.2183  
email: support@n-psi.com  
web: www.n-psi.com

# technical specification

dimensions & weight

length in (mm)	108.4 (2753.4)
depth in (mm)	71 (1803.4)
height in (mm)	115.5 (2933.7)
weight lbs (kgs)*	14,200 (6441)

\*does not include desiccant

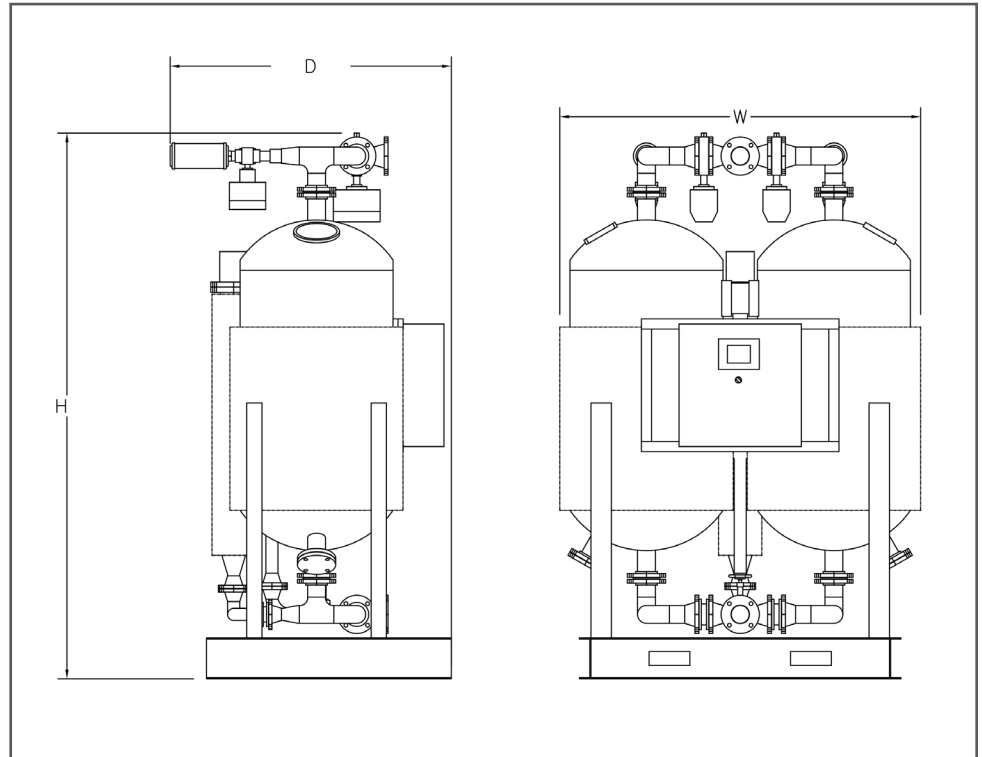

experience