

## HLA 2000

115V/1Ph/60Hz - 2000 scfm desiccant air dryer

The nano D<sup>5</sup> twin tower heatless desiccant air dryer provides clean dry air for a wide range of industrial applications. These dryers use the pressure swing adsorption principle in a twin tower design to dehydrate and purify compressed air in a simple, efficient and compact package. With digital controls that manage energy consumption and provide dew point monitoring, the D<sup>5</sup> twin tower heatless desiccant air dryer provides substantial energy savings under various seasonal conditions for critical applications.



### general characteristics

rated capacity (scfm)*	2000
regeneration air (scfm)*	300
absorbed power (kW)	0.35

### operating limits

minimum/design/maximum operating pressure range (psig)	80 / 100 / 150
minimum/design/maximum ambient temperature range (°F)	38 / 100 / 120
minimum/design/maximum inlet temperature (°F)	38 / 100 / 120

### desiccant chambers

desiccant type	1/8" activated alumina
desiccant weight (lbs)	2000

### controls/design

dryer design	PSA heatless regenerative
controller type	PLC
power supply (V/Ph/Hz)	115/1/60
NEMA rating	NEMA 4X

### air circuit

air circuit connections (Flg)	4"
-------------------------------	----

### ISO class

ISO air quality class (water content)	class 2 (-40°F pdp) class 0 or class 1 optional
---------------------------------------	--

\*in compliance with CAGI (ADF 100) / NFPA (class H): inlet temperature 100°F, ambient temperature 100°F, inlet pressure 100 psig, pressure dew point -40°F (-94°F optional). For all other conditions, contact support@n-psi.com

### features

- UL/cUL compliant
- ASME U stamped pressure vessels
- visual moisture indicator
- integral energy saving outlet dew point control (ES optional)
- pre- and after filters recommended
- variety of options including bypass and pre-packaged systems

### electrical features

- PLC controller
- fiber glass cUL panel for NEMA 4X protection class
- ETL approved electrical panel

nano-purification solutions  
Charlotte, North Carolina  
United States

nano-purification solutions TN  
Maryville, Tennessee  
United States

nano-purification solutions Canada  
St. Catharines, Ontario  
Canada

nano-purification solutions Ltd.  
Gateshead, Tyne and Wear  
United Kingdom

nano-purification solutions GmbH  
Erkelenz, Germany

nano-purification solutions Asia  
Singapore

Tel: 704.897.2182  
Fax: 704.897.2183  
Email: support@n-psi.com  
Web: www.n-psi.com




# technical specification

dimensions & weight

width (in)	111
depth (in)	78
height (in)	112
weight (lbs)	4600

\*does not include desiccant  
 \*\*all numbers are approximate

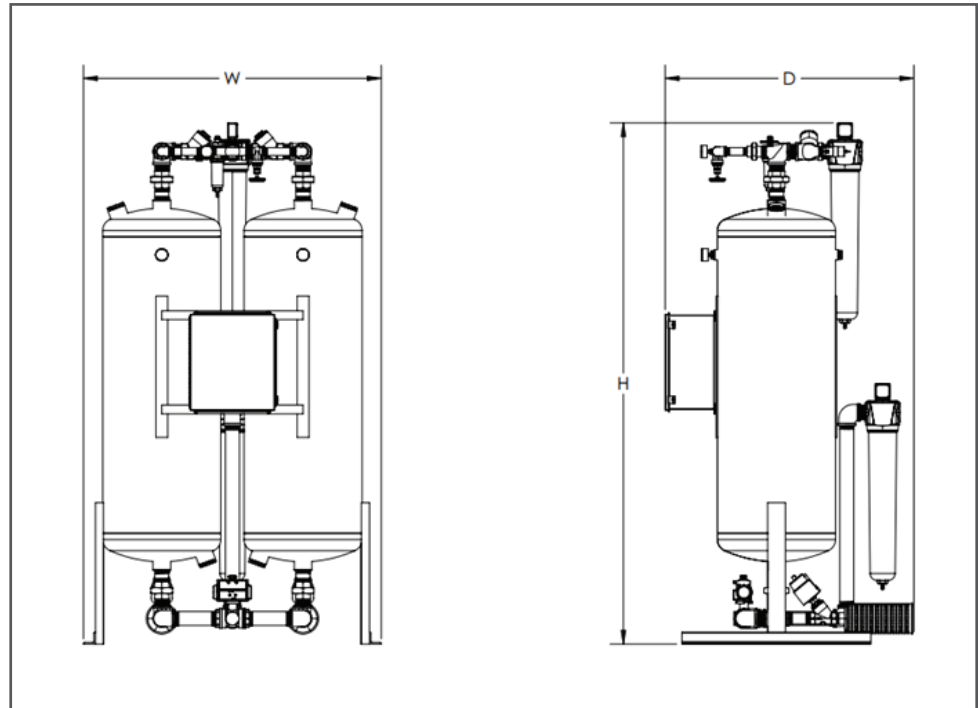

experience