



nano F<sup>1</sup>: Compressed Air & Gas Filtration

# GFN 0850 (grade)

850 scfm Compressed Air & Gas Filter

nano GFN performance validated compressed air & gas filters are available in a complete range of element grades designed to meet and exceed industry air quality requirements. Filtration performance is tested and validated by an independent laboratory to ISO 12500 standards.



GENERAL CHARACTERISTICS	
Rated flow (scfm) <sup>(1)</sup>	850
OPERATING LIMITS	
Design operating pressure range (psig) <sup>(2)</sup>	22 to 232
Design operating temperature range (°F)	32 to 176
HOUSING CONSTRUCTION	
Materials	pressure die cast aluminum
Finish	E-Coat™ surface treatment (internal & external) powder paint (external)
ELEMENT CONSTRUCTION	
Media	borosilicate glass microfiber
End Caps	glass filled nylon
Replacement element (part no.)	GE 0900 (grade)
COMPONENTS	
Automatic float drain	GFDK 1500
Differential pressure indicator / gauge	GFDP 1500
AIR CIRCUIT	
Inlet & outlet connections (NPT)	2 ½"

(1) At 100 psig. For all other pressures, contact support@nano-purification.com.  
 (2) For pressure below 22 psig, order with a GFDK 0050 for models GF 0070 to 1500.  
 For pressures up to 300 psi use manual drain valve.

## Features

### HOUSING FEATURES


- Designed in accordance with ASME pressure vessel standards.
- Carries CRN (Canadian Registration Numbers) for approved use in every province of Canada.
- "Dead Stop" bowl feature provides full closure without over tightening.
- 10 year housing warranty
- Optimized seal ensures zero leakage and ease of bowl removal during element replacement.
- No tie rod simplifies element change out and reduces access requirements for bowl removal.
- Comprehensive range of filter mounting accessories.

### ELEMENT FEATURES

- Designed to exceed the ISO 8573-1 standards for compressed air purity and the ISO 12500 series international standard for compressed air filter testing.
- Filtration performance validated and tested in independent laboratories in accordance with international standards.
- Stainless steel cylinders provide strength, rigidity and corrosion resistance.
- Pleated filter media provides low differential pressure.

## Dimensions & Weight

DIMENSIONS AND WEIGHT	
A (ins)	8.66
B (ins)	2.76
C (ins)	28.98
D (ins)	1.18
E (ins)	33.4
Weight (lbs)	23.1

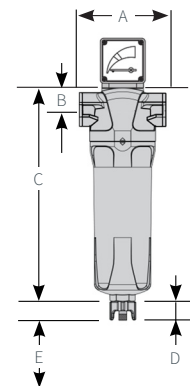

\*DP gauge adds 2.8" to height

# nano F<sup>1</sup>: Compressed Air & Gas Filters

ELEMENT GRADES	M1	M01	AC
Maximum particle size (ISO class) <sup>(3)</sup>	3	1	-
Maximum oil content (ISO class) <sup>(3)</sup>	3	2	1
Particle removal (microns)	1	0.01	-
Max oil carry over at 68°F (ppm or mg/m <sup>3</sup> )	0.3	0.01	0.003
Design operating temperature range (°F)	32 to 176	32 to 176	32 to 122

(3) Per ISO 8573.0:2001 (E).

## Accessories

CONNECTING KITS	FITS	PART NUMBER
Connecting kit (2 filters)	GFN 0850	GFCK-2 1500
Connecting kit (3 filters)	GFN 0850	GFCK-3 1500
Connecting kit (4 filters)	GFN 0850	GFCK-4 1500

WALL MOUNTING KITS	FITS	PART NUMBER
Wall mounting kit	GFN 0850	GFMK 1500



Technical specifications subject to change without notice.  
 Publication Reference: GFN0850-US-EN-Version-00  
 ©2024 Air & Gas Solutions LLC



**nano**  
 Experience. Customer. Service.

nano-purification solutions  
[www.nano-purification.com](http://www.nano-purification.com)

United States  
 Charlotte, North Carolina  
 Phone: +1 704 897 2182  
 Email: [support@nano-purification.com](mailto:support@nano-purification.com)

United States | Canada | United Kingdom | Germany | Singapore