

## NDL 110-F2-LDP

100-240 VAC/50 or 60 Hz - 74 scfm desiccant air dryer

The nano D<sup>2</sup> modular low dew point air dryer provides clean dry air for a wide range of industrial applications. These dryers use the pressure swing adsorption principle in a modular design to dehydrate and purify your compressed air in a simple, efficient and compact package. With digital PLC controls that manage energy consumption and provide dew point monitoring, the D<sup>2</sup> modular low dew point desiccant air dryer provides substantial energy savings under various seasonal conditions for critical applications.



general characteristics	
rated flow (scfm) <sup>(1)</sup>	74
regeneration air (scfm)	21.2
absorbed power (kW)	0.0360
power supply (V/Ph/Hz) <sup>(2)</sup>	100-240 VAC/50 or 60 Hz
operating limits	
design operating pressure range (psig)	58 to 232
design operating temperature range (°F)	34 to 100
minimum/maximum ambient temperature (°F)	34 to 122
maximum inlet temperature (°F)	not to exceed 85
desiccant chambers	
desiccant type	13X molecular sieve
desiccant cartridges with integrated after filter (kit no)	NDK 110 LDP
controls/design	
dryer design	PSA
controller type	PLC
NEMA rating	NEMA 1
air circuit	
air circuit connections (PTC)	1"
ISO class	
ISO air quality class (water content)	class 1 (-94°F pdp)

(1) in compliance with CAGI (ADF 100) / NFPA (class H): inlet temperature 85°F, ambient temperature 100°F, inlet pressure 100 psig, pressure dew point -94°F. For all other conditions, contact support@n-psi.com

(2) optional 24 V DC

## features

- c-ETL-US certification
- includes separate F<sup>1</sup> M1 and M01 grade pre filters with timer drains (shipped loose) and a built in 1 micron after filter
- patented combined filter & desiccant cartridge; no after filter required
- advanced PLC controlled operation
- built in reliability with a 2-year warranty
- energy saving dew point control (optional)
- floor or wall mounted (optional wall mounting brackets available) installation
- reliable high performance valves
- tower pressure gauges
- tower equalization for constant flow and pressure
- designed for tough industrial settings
- integrated compressor synchronization function
- advanced PLC features: digital interface, digital LED display, outlet air dew point indication (with ES option)
- user programmable operating parameters
- alarm indication

nano-purification solutions  
charlotte, north carolina  
united states

nano-purification solutions  
new bethlehem, pennsylvania  
united states

nano-purification solutions  
st. catharines, ontario  
canada

nano-purification solutions  
gateshead, tyne and wear  
united kingdom


nano-purification solutions  
krefeld, germany

tel: 704.897.2182  
fax: 704.897.2183  
email: support@n-psi.com  
web: www.n-psi.com

## technical specification

### dimensions and weights

A (ins)	49.1
B (ins)	16.8
C (ins)	11.1
weight (lbs)	167

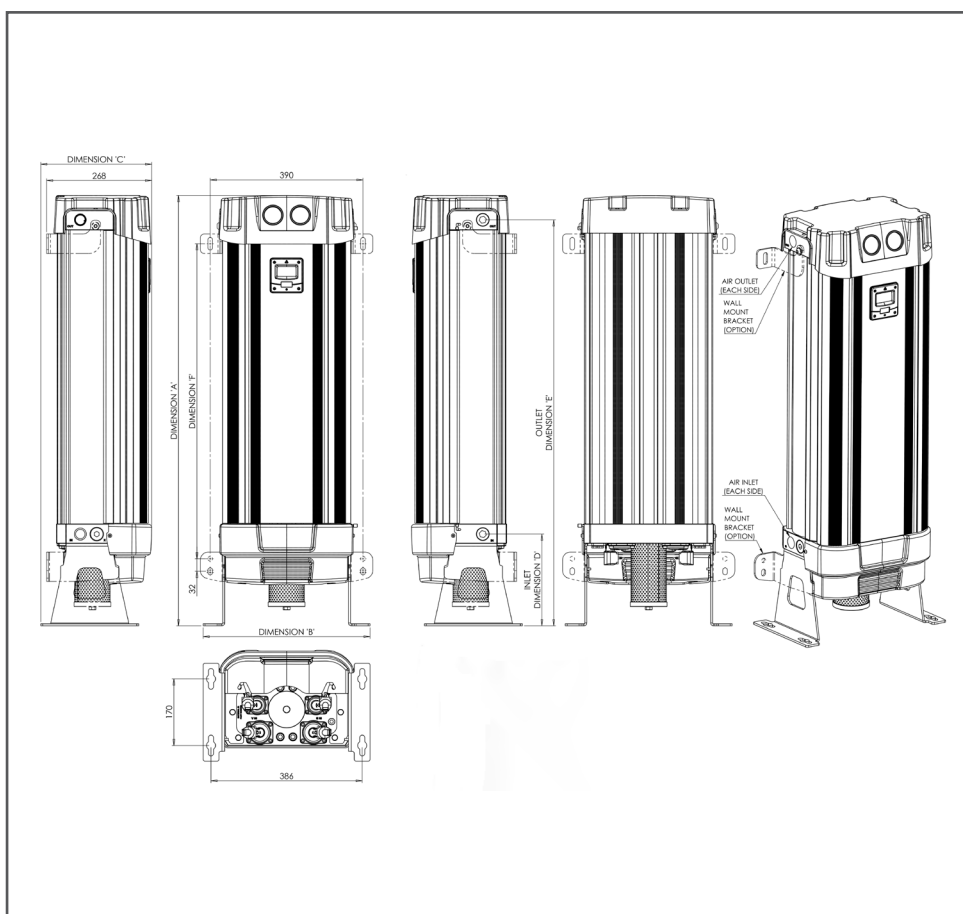

experience