



nano D^{1|2|3}: Modular Low Dew Point Desiccant Air Dryers

NDL 2130N LDP

100–240 VAC/50 or 60 Hz – 280 scfm Desiccant Air Dryer

The nano D^{1|2|3} modular low dew point air dryer provides clean dry air for a wide range of industrial applications. These dryers use the pressure swing adsorption principle in a modular design to dehydrate and purify your compressed air in a simple, efficient and compact package. With digital PLC controls that manage energy consumption and provide dew point monitoring, the D^{1|2|3} modular low dew point desiccant air dryer provides substantial energy savings under various seasonal conditions for critical applications.




GENERAL CHARACTERISTICS	
Rated capacity (scfm) ⁽¹⁾	280
Regeneration air (scfm) ⁽¹⁾	80
Absorbed power (kW)	0.0360
Power supply (V/Ph/Hz) ⁽²⁾	100 to 240 /50 or 60
OPERATING LIMITS	
Design operating pressure range (psig) ⁽³⁾	58 to 145
Design operating temperature range (°F)	35 to 100
Minimum/maximum ambient temperature (°F)	35 to 122
Maximum inlet temperature (°F)	not to exceed 85
DESICCANT CHAMBERS	
Desiccant type	13x molecular sieve
Desiccant cartridges with integrated afterfilter (kit no)	NDK2 2100 LDP
CONTROLS/ DESIGN	
Dryer design	PSA
Controller type (PLC)	programmable logic controller
NEMA rating	NEMA 1
AIR CIRCUIT	
Air circuit connections (NPT)	2"
ISO CLASS	
ISO air quality class (water content)	class 1 (-94°F pdp)

(1) In compliance with CAGI (ADF 100) / NFPA (class H): inlet temperature 85°F, ambient temperature 100°F, inlet pressure 100 psig, pressure dew point -94°F. For all other conditions, contact candasupport@airandgassolutions.com.

(2) Optional 24 V DC

Dimensions & Weight

DIMENSIONS AND WEIGHT	
A (ins)	73.7
B (ins)	26.9
C (ins)	15.7
Weight (lbs)	575

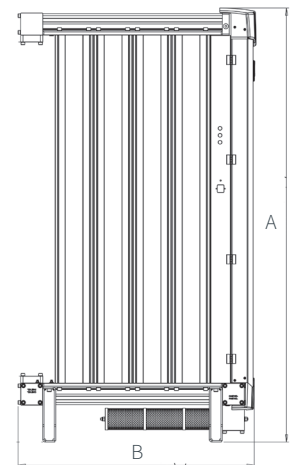

nano D¹¹²13: Modular Low Dew Point Desiccant Air Dryers

Features

- C-ETL-US certification
- Includes a built in 1 micron afterfilter.
- Advanced PLC controlled operation
- Energy saving dew point control (optional)
- Built in reliability with a 2-year warranty
- Robust modular compact aluminum design
- Reliable high-performance valves
- Tower equalization for constant flow and pressure.
- Designed for tough industrial settings.
- Integrated compressor synchronization function
- Tower pressure gauges as standard

Advanced PLC Features

- Energy-aware control with PDP switching (Optional sensor)
- Continuous pressure and temperature monitoring
- Clear alarms, event logs, and guided diagnostics
- Intuitive HMI with quick start/stop
- Modbus TCP connectivity
- Industrial protection (up to IP65/NEMA 4, panel-mounted with gasket)
- Drop-in retrofit or factory-fit
- Service-friendly wiring harness
- Audit-ready data logging
- Interoperability with companion equipment

Technical specifications subject to change without notice.
Publication Reference: NDL2130-D3-LDP-CA-EN-Version-001
©2026 Air & Gas Solutions LLC



nano
Experience. Customer. Service.

nano-purification solutions
www.nano-purification.com

Canada
St. Catharines, Ontario, Canada
Phone: +1 905 684 6266
Email: canadasupport@airandgassolutions.com

United States | Canada | United Kingdom | Singapore