

HLA 650

115V/1Ph/60Hz - 650 scfm desiccant air dryer

The nano D⁵ twin tower heatless desiccant air dryer provides clean dry air for a wide range of industrial applications. These dryers use the pressure swing adsorption principle in a twin tower design to dehydrate and purify compressed air in a simple, efficient and compact package. With digital controls that manage energy consumption and provide dew point monitoring, the D⁵ twin tower heatless desiccant air dryer provides substantial energy savings under various seasonal conditions for critical applications.



general characteristics

rated capacity (scfm)*	650
regeneration air (scfm)*	98
absorbed power (kW)	0.35

operating limits

minimum/design/maximum operating pressure range (psig)	80 / 100 / 150
minimum/design/maximum ambient temperature range (°F)	38 / 100 / 120
minimum/design/maximum inlet temperature (°F)	38 / 100 / 120

desiccant chambers

desiccant type	1/8" activated alumina
desiccant weight (lbs)	650

controls/design

dryer design	PSA heatless regenerative
controller type	PLC
power supply (V/Ph/Hz)	115/1/60
NEMA rating	NEMA 4X

air circuit

air circuit connections (NPT(F))	2"
----------------------------------	----

ISO class

ISO air quality class (water content)	class 2 (-40°F pdp) class 0 or class 1 optional
---------------------------------------	--

*in compliance with CAGI (ADF 100) / NFPA (class H): inlet temperature 100°F, ambient temperature 100°F, inlet pressure 100 psig, pressure dew point -40°F (-94°F optional). For all other conditions, contact support@n-psi.com

features

- UL/cUL compliant
- ASME U stamped pressure vessels
- visual moisture indicator
- integral energy saving outlet dew point control (ES optional)
- pre- and after filters recommended
- variety of options including bypass and pre-packaged systems

electrical features

- PLC controller
- fiber glass cUL panel for NEMA 4X protection class
- ETL approved electrical panel

nano-purification solutions
Charlotte, North Carolina
United States

nano-purification solutions TN
Maryville, Tennessee
United States

nano-purification solutions Canada
St. Catharines, Ontario
Canada

nano-purification solutions Ltd.
Gateshead, Tyne and Wear
United Kingdom

nano-purification solutions GmbH
Erkelenz, Germany

nano-purification solutions Asia
Singapore

Tel: 704.897.2182
Fax: 704.897.2183
Email: support@n-psi.com
Web: www.n-psi.com


technical specification

dimensions & weight

width (in)	51
depth (in)	53
height (in)	89
weight (lbs)	1600

*does not include desiccant

**all numbers are approximate

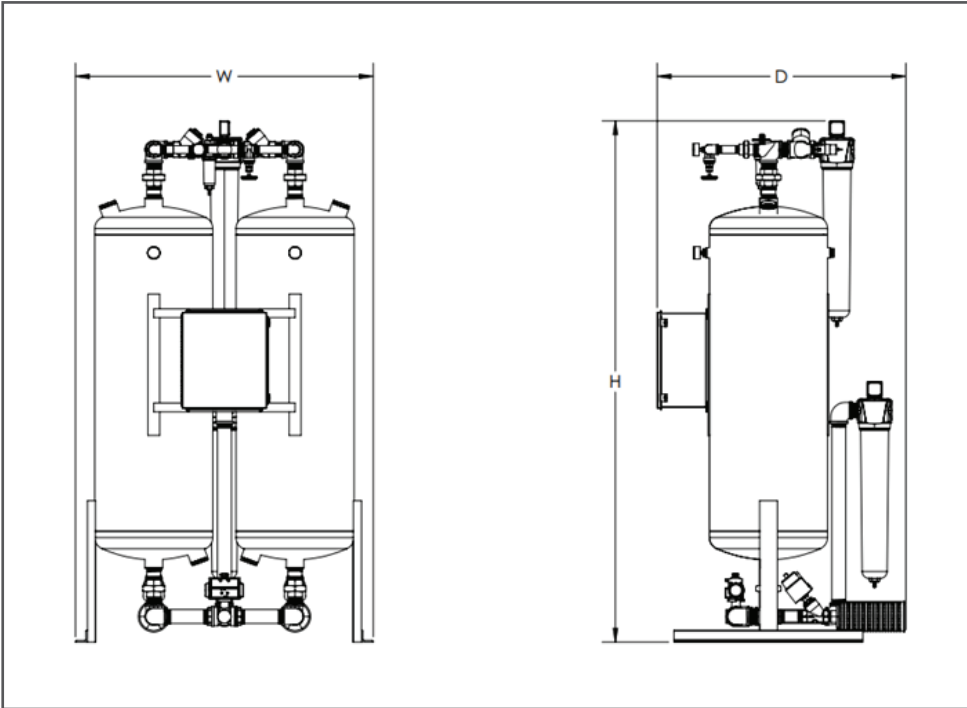

experience