VOLTAGE	FULL LOAD AMPS.(FLA)
460VAC/3PH/60HZ	60AMPS

REVISIONS					
ZONE	REV	ECO NO	DESCRIPTION	DATE	REV BY
	00	XXXXX	RELEASED	MM-DD-YY	XXX

NOTE: IT IS RECOMMENDED TO INSTALL A FUSIBLE DISCONNECT OR CIRCUIT BREAKER TO MEET ANY FEDERAL,STATE OR LOCAL ELECTRICAL CODES.

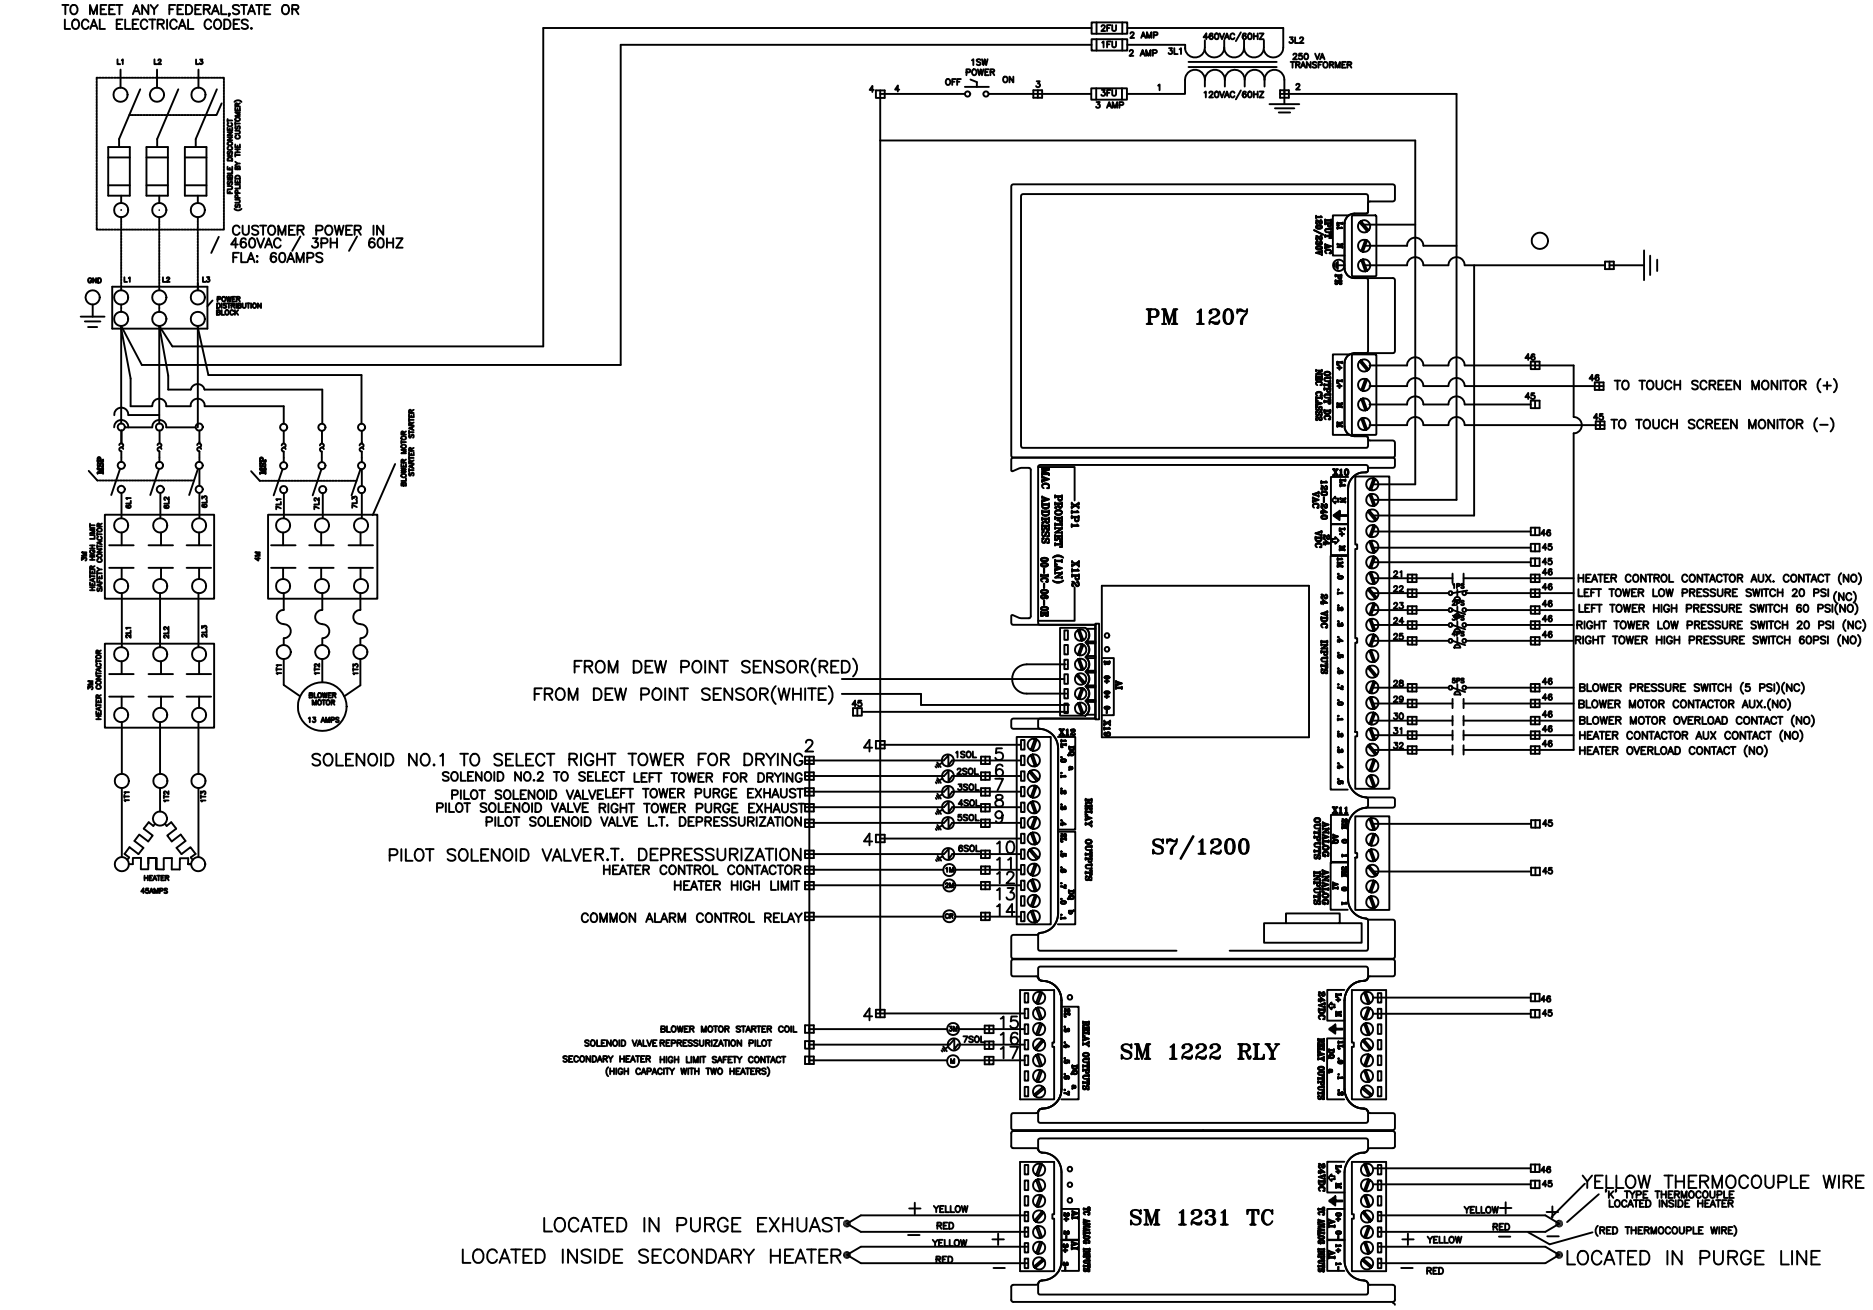

TOLERANCES U.O.S	
DIMENSIONS ARE IN INCHES	
ONE DECIMAL PLACE	±0.1
TWO DECIMAL PLACES	±0.03
THREE DECIMAL PLACES	±0.010
ANGULAR DIMENSION	±1.0°
HOLE DIAMETER	±0.03

FINISH:
□ 125 UNLESS NOTED
□ AS CAST UNLESS NOTED

MATERIAL SPEC	
HEAT TREAT	
TORQUE SPEC	
MAMF SPEC	
HARDNESS	
FINISH SPEC	

THIS DOCUMENT IS THE PROPERTY OF NORTEC CORPORATION. YOU MAY NOT POSSESS, USE, COPY OR DISCLOSE THIS DOCUMENT OR ANY INFORMATION IN IT FOR ANY PURPOSE, INCLUDING WITHOUT LIMITATION, TO DESIGN, MANUFACTURE OR REPAIR PARTS, OR OBTAIN ANY GOVERNMENT APPROVAL, EXCEPT TO DO SO WITHOUT NORTEC'S EXPRESS WRITTEN PERMISSION. THIS DOCUMENT AND ANY POSSESSION OF THIS DOCUMENT ALONE FROM ANY SOURCE CONSTITUTES SUCH PERMISSION. POSSESSION, USE, COPYING OR DISCLOSURE BY ANYONE WITHOUT NORTEC'S EXPRESS WRITTEN PERMISSION IS NOT AUTHORIZED AND MAY RESULT IN CRIMINAL AND/OR CIVIL LIABILITY.

PROD CODE	DRAWN BY	DATE
	MZ	3-16-12

THIRD ANGLE PROJECTION
DO NOT SCALE DRAWING

NANO-PSI CORPORATION

WD, BLOWER PURGE DRYER NBP-2000

SIZE	CAGE CODE	DWG NO	REV
C	31654	NBP-2000-E1	00

SCALE 1 : 1 | WEIGHT | SHEET 1 OF 1