

CABLE BILL OF MATERIALS

2205042351 WIRE HARNESS E6/BE6 230/60 UL FC



CABLE FOR	LENGTH mm	CABLE TYPE	SIDE A		SIDE B		NOTES	ID	DESCRIPTION	TYPE	MANUFACTURER	CODE	QUANT.	POSITION	
			L1 mm	TERMINAL TYPE	L2 mm	TERMINAL TYPE									
MAIN SUPPLY	3300	AWG14 3G2.5	80	3xBF-P10	80	2xBF-P10 + S2,5-M6	LISTED SJ, SJT, SJTO, SJOOW, SJTOW. Style 2587 or 2550 or 21098 or 21216 or equivalent	DSC	SWITCH	OT25FT3	ABB	1089949849	1		
SOLENOID VALVE SL+EV	1450	AWG18 2G1	-	43650/B **	80	2xGF-P10			HANDLE	OHBS3RH	ABB	1089949850	1		
DIGITAL CONTROLLER DC	300	AWG14 2G2.5	80	3 x BF-F608P + GF-F608P S6-M6(GND)	120	2xBN-FAB608 + CFAB600 + S2.5-M4(GND)			CABLE GLAND	M20X1,5		0698514121	1	LOOSE	
MOTOR M1 (*1)	1500	AWG14 3G2.5	100 - 300GND		70 - 120GND					NUT	M20x1,5		0697980953	1	LOOSE
FAN M2	400	AWG14 3G2.5	200		60					X5	CONNECTOR	PA21		2203080501	3
FREE CONTACT FC	300	AWG18 2G1	80	2 x RF-F608P	80	2 x 221-412		X4	HOUSING		0993421506	3	LOOSE		
									SERVICE DIAGR.			2205042350	1		

(*1) cable $\Phi_{ext} \leq 8.6mm$


- ** SUPPLY WITHOUT GASKET
FIX THE SCREW WITH ADHESIVE TAPE
- SU DISCONNECTOR SWITCH CUSTOMER CARE INSTALLATION
 - FU FUSES CUSTOMER CARE INSTALLATION
 - DSC DISCONNECTOR SWITCH
 - SL LEVEL SWITCH
 - EV DRAIN SOLENOID VALVE
 - M1 COMPRESSOR MOTOR
 - M2 FAN MOTOR
 - DC DIGITAL CONTROLLER
 - K1 OVERLOAD RELAY
 - K2 STARTING RELAY
 - K3 COMPRESSOR SWITCH
 - K4 FAN SWITCH
 - K5 FREE CONTACT
 - C STARTING CAPACITOR
 - T1 TEMPERATURE SENSOR NTC (P1)
 - T2 TEMPERATURE SENSOR NTC (P2)
 - T3 TEMPERATURE SENSOR PTC (P3)
 - X1 FREE CONTACT
 - X5 FAN TERMINAL BLOCK

COMPULSORY INSTALLATION AT CUSTOMER CARE:
FUSES (FU) + DISCONNECTOR SWITCH (SU)
SU size $\geq FLA \times 1.25$
FU TIME DELAY FUSES

Model	FLA	CC type fuses	J or RK type fuses
E6/BE6	7.3	15	10

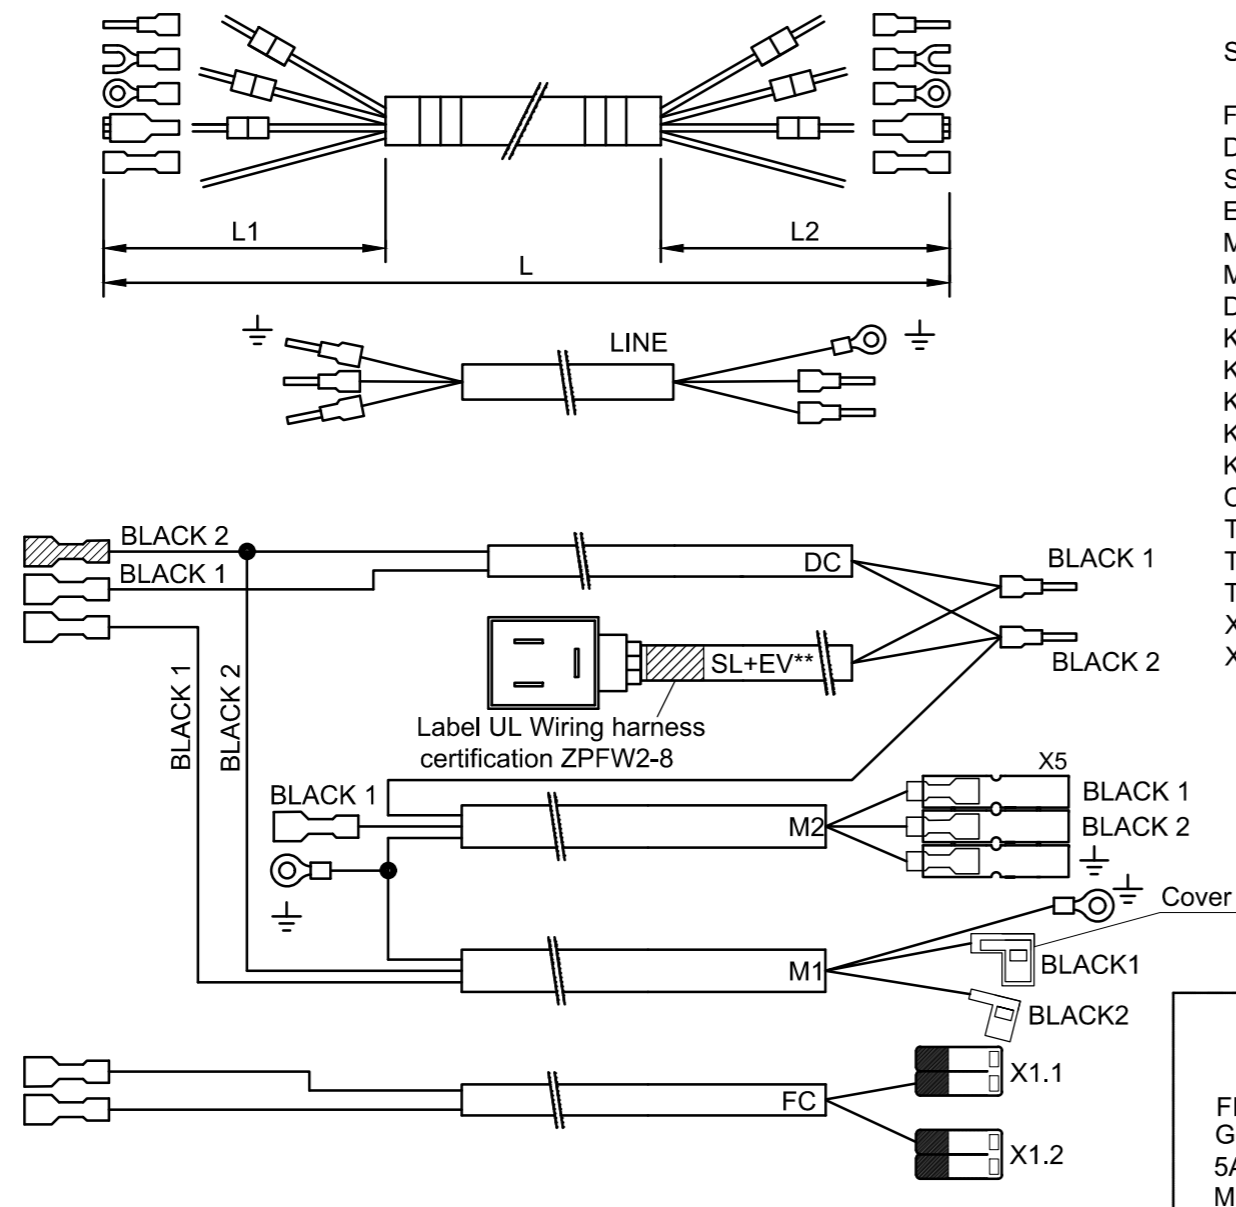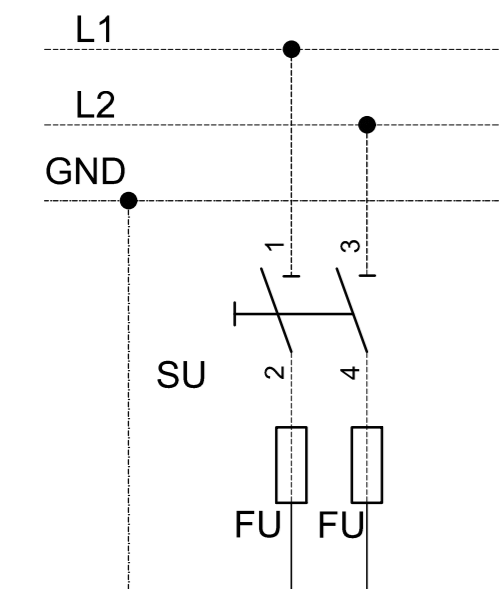

X1.1
X1.2
FREE CONTACT
Generale alarm:
5A/250Va.c. AC1
Min. Voltage > 50V

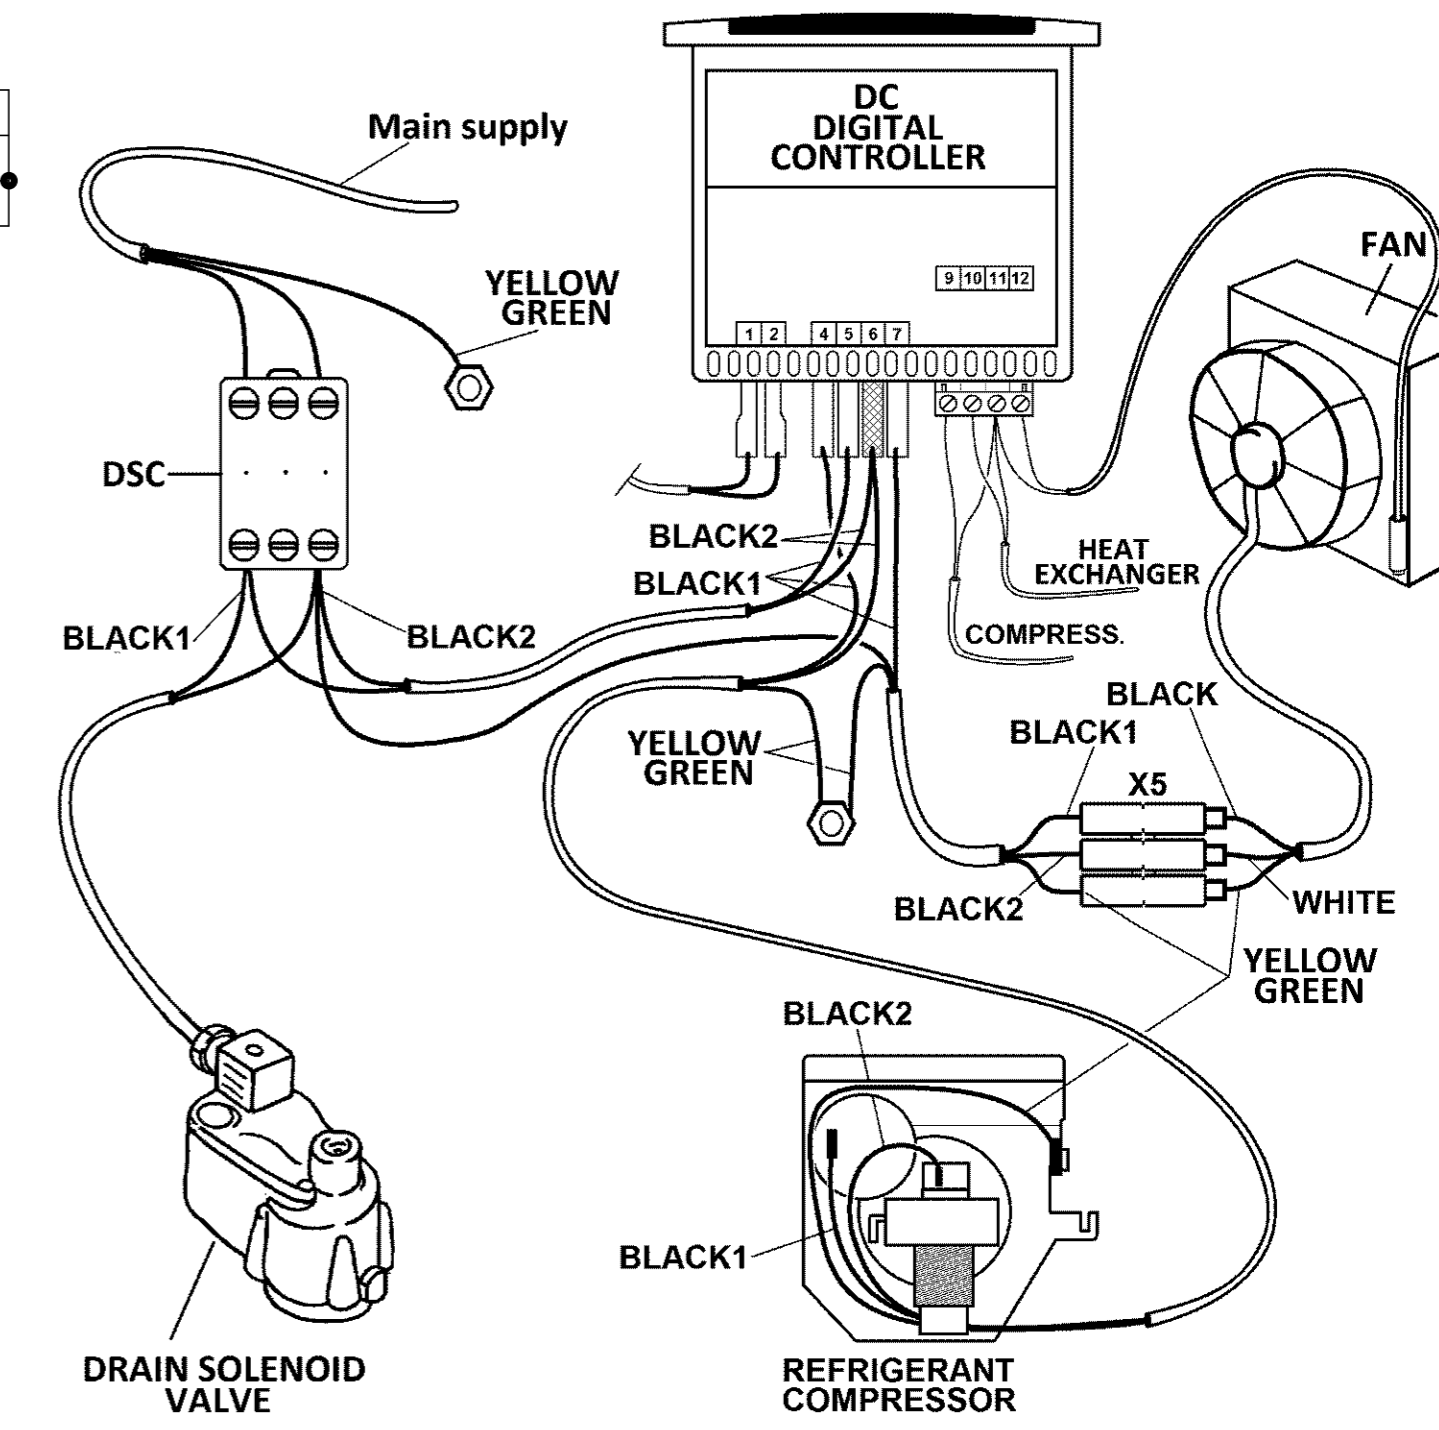

Note	Position	Modified from	Date	Intr./Appd.
04		Title block updated & DN 220541 17 and CID28208	04-04-2022	

All materials supplied are in compliance with the requirements of the List of Prohibited Substances

Parent 3D Model	Ed.Version 3D	Approved Internal	Scale: --	Family: --	Compare: --	Designation: --	Sheet: 01 of 01
-----------------	---------------	-------------------	-----------	------------	-------------	-----------------	-----------------

Tolerances, if not indicated, according to:		General tolerances		1350K - V	
Name	SERVICE DIAGRAM	E6/BE6 230V 60Hz UL FC		Confidentiality class acc. to 1102 K	
Material	See Drawing			Internal	
Treatment	Not Applicable			ACDE	
Scale	--	Family	--	Compare	--
Drawn by	--	Blank nr.	--	Replaces	--
Drawing format	03.00	Blank wt.	Kg	Fini wt.	Kg
Des checked.		Prod checked.		Approved.	
Date	01/03/2018 16:33:54	2205042350			

CONFIDENTIAL: This document is property of Atlas Copco AB and shall not be distributed or used without our permission. All rights reserved. Copying, reuse for manufacturing or communication to any other person or company is prohibited.