

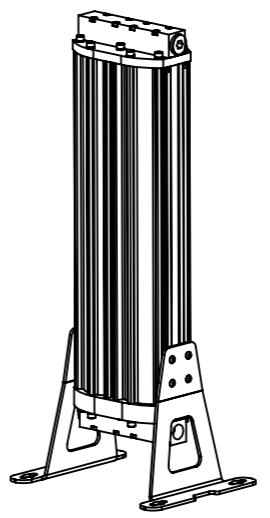
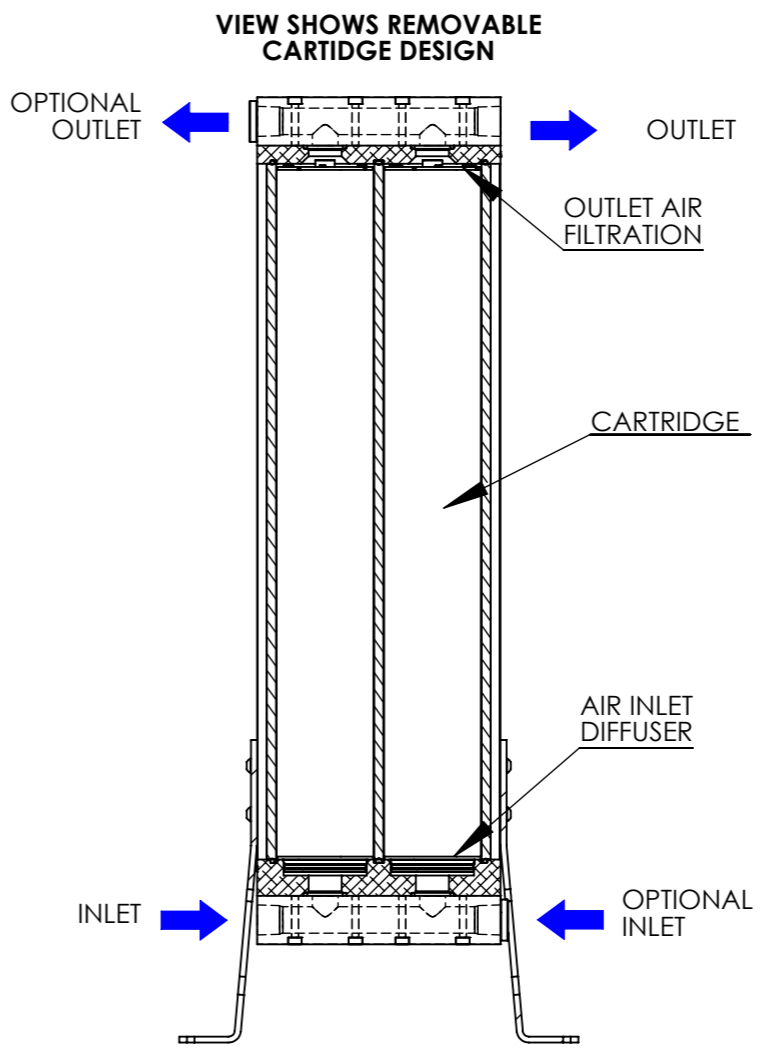


PRODUCT CODE	MAXIMUM FLOW RATE scfm (M ³ /Hr)*	INLET / OUTLET CONNECTIONS
NBM-030	30 (51)	1/2" BSPP / NPT
* AT INLET CONDITIONS OF 7 BARG & 35°C, 35°C AMBIENT		

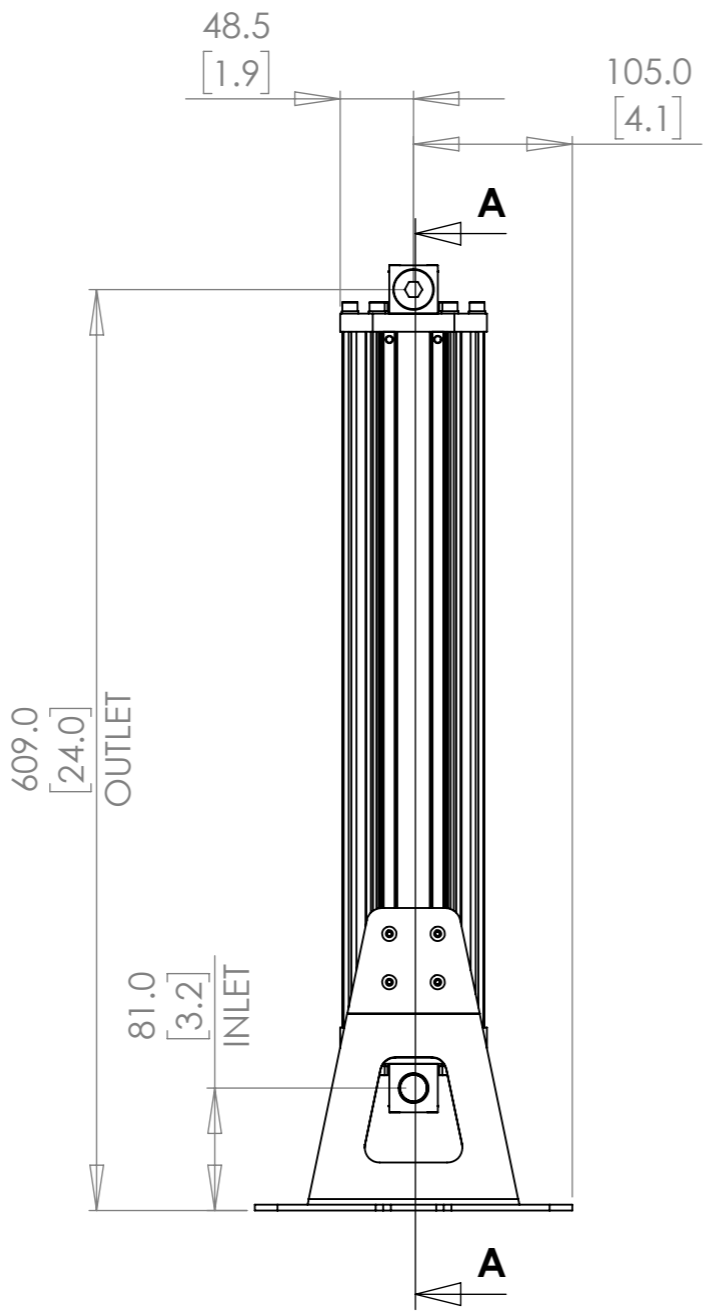

PICTORIAL VIEW
NBM-030

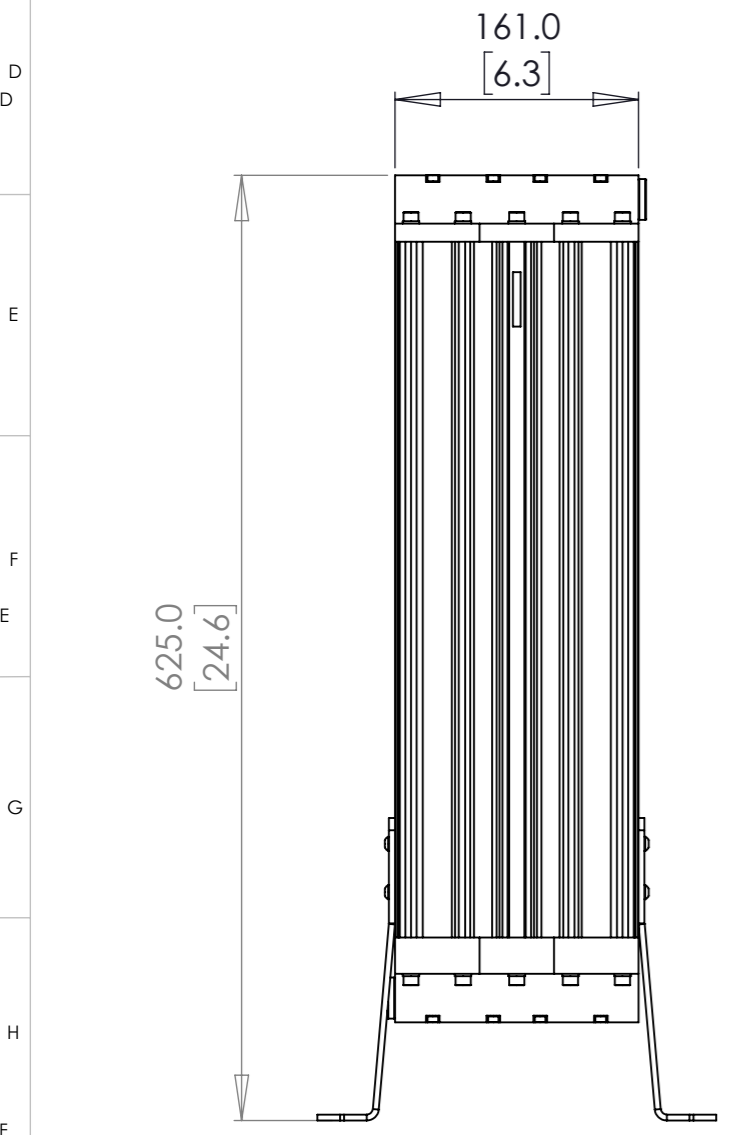

SECTION A-A
SCALE 1 : 5

REVISIONS		
REV.	DESCRIPTION	DATE
C-00	INITIAL REVISION	01/03/2022

SPECIFICATION:

INLET CONDITIONS

- **RECOMMENDED PRESSURE:**
7 bar / 100 psig
(MAXIMUM 16 bar / 232 psig)
- **RECOMMENDED TEMPERATURE:**
1.5°C (36°F) TO 30°C (86°F)
- **MAXIMUM TEMPERATURE:**
50°C (122°F)

INLET AIR QUALITY

(ACCORDING TO ISO 8573.1 QUALITY)

- **DIRT** <0.5 micron CLASS 2
- **MAXIMUM PRESURE DEW-POINT:** -40 F CLASS 2
- **OIL AEROSOL** <0.01 mg.m3 CLASS 2
- **CO** 50 ppm MAXIMUM
- **CO2** <500 ppm

OUTLET AIR QUALITY

- **CO2:** <5ppm
- **FREE FROM ODOURS**
- **DIRT:** <0.5 microns CLASS 2

USE OF REPLACEMENT CARTRIDGES

- REPLACE EVERY 1 YEAR OR 8,000 HOURS WHICHEVER OCCURS FIRST

GENERAL NOTES

- PRESSURE RELIEF VALVE SHOULD BE FITTED TO THE SYSTEM
- CO ALARM MUST BE FITTED ON OUTLET OF PRODCUT
- HIGH TENSILE ALUMINIUM POWDER PAINTED HOUSING
- FEET BRACKETS SUPPLIED

GENERAL TOLERANCES UNLESS OTHERWISE STATED:
X ± 0.5mm | X.X ± 0.25mm | X.XX ± 0.1mm
ANGLES ± 0.5°

	DRAWN	CHECKED	APPROVED
NAME	CK	IC	IC
DATE	25/2/22	25/2/22	25/2/22

nano-purification solutions limited 
www.n-psi.co.uk

© NANO-PURIFICATION SOLUTIONS LTD 2022. THE ORIGINAL OF THIS DRAWING IS COPYRIGHT AND CONTAINS CONFIDENTIAL INFORMATION. IT IS THE PROPERTY OF NANO PURIFICATION SOLUTIONS LTD WITHOUT WHOSE PERMISSION IT MAY NOT BE COPIED, SHOWN OR HANDED TO A THIRD PARTY OR OTHERWISE USED AND IT IS TO BE RETURNED PROMPTLY UPON REQUEST TO NANO PURIFICATION SOLUTIONS LTD.

MATERIAL:	SEE DETAILS	WEIGHT (KG):	12.0
FINISH:	SEE DETAILS		

TITLE: SERIES 1 BREATHING AIR MODULE

DWG NO. PD-0060	REVISION: C-00
-----------------	----------------

SCALE - 1:5		SHEET 1 OF 1	SHEET SIZE A3
DO NOT SCALE DRAWING			