


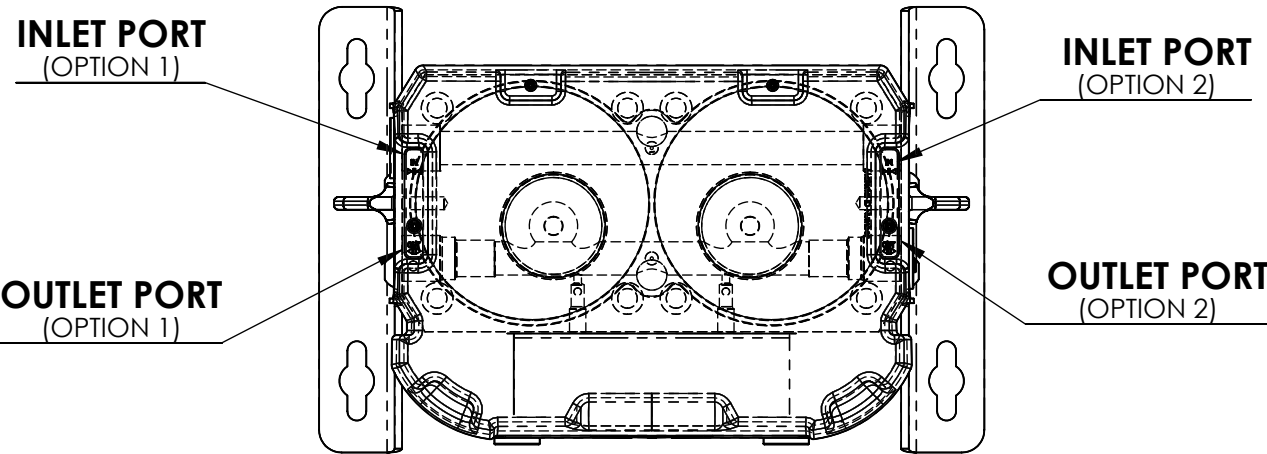


INLET / OUTLET CONNECTIONS

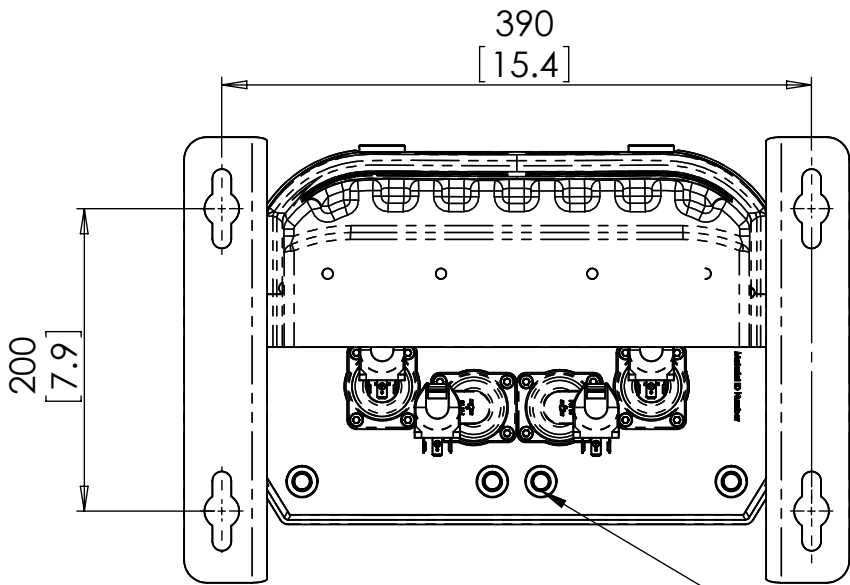


LIFTING EYES TO BE  
REMOVED PRIOR TO PIPING  
UP AND OPERATION  
(M10 LIFTING EYES NOT SUPPLIED)

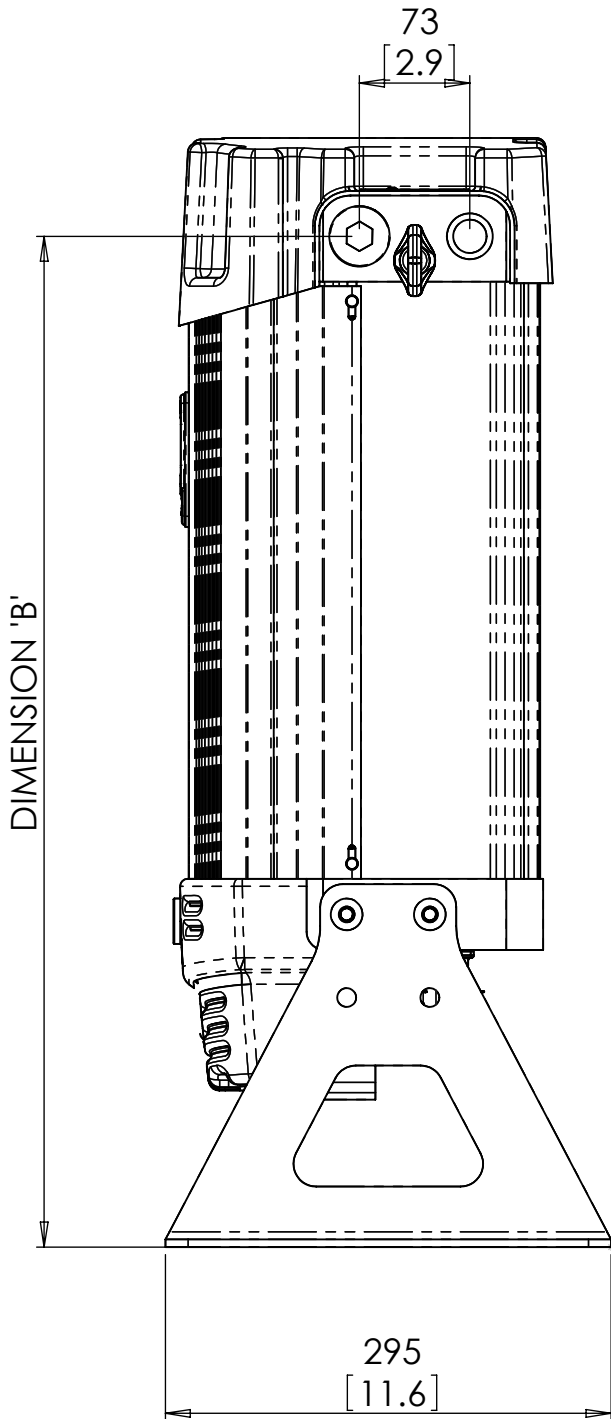

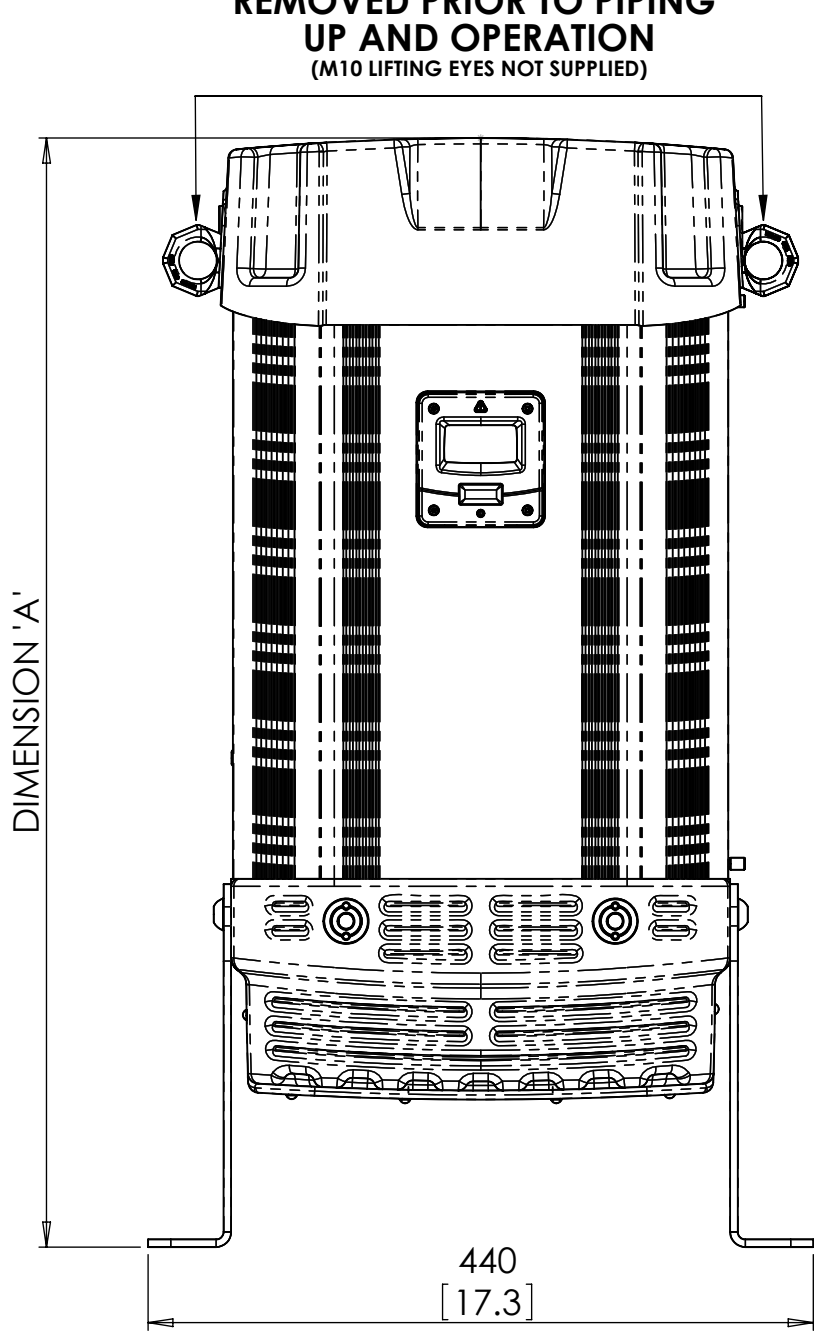

NOTE: FIXING BOLT  
SPECIFICATION  
CONFORMS TO SA-193 B7

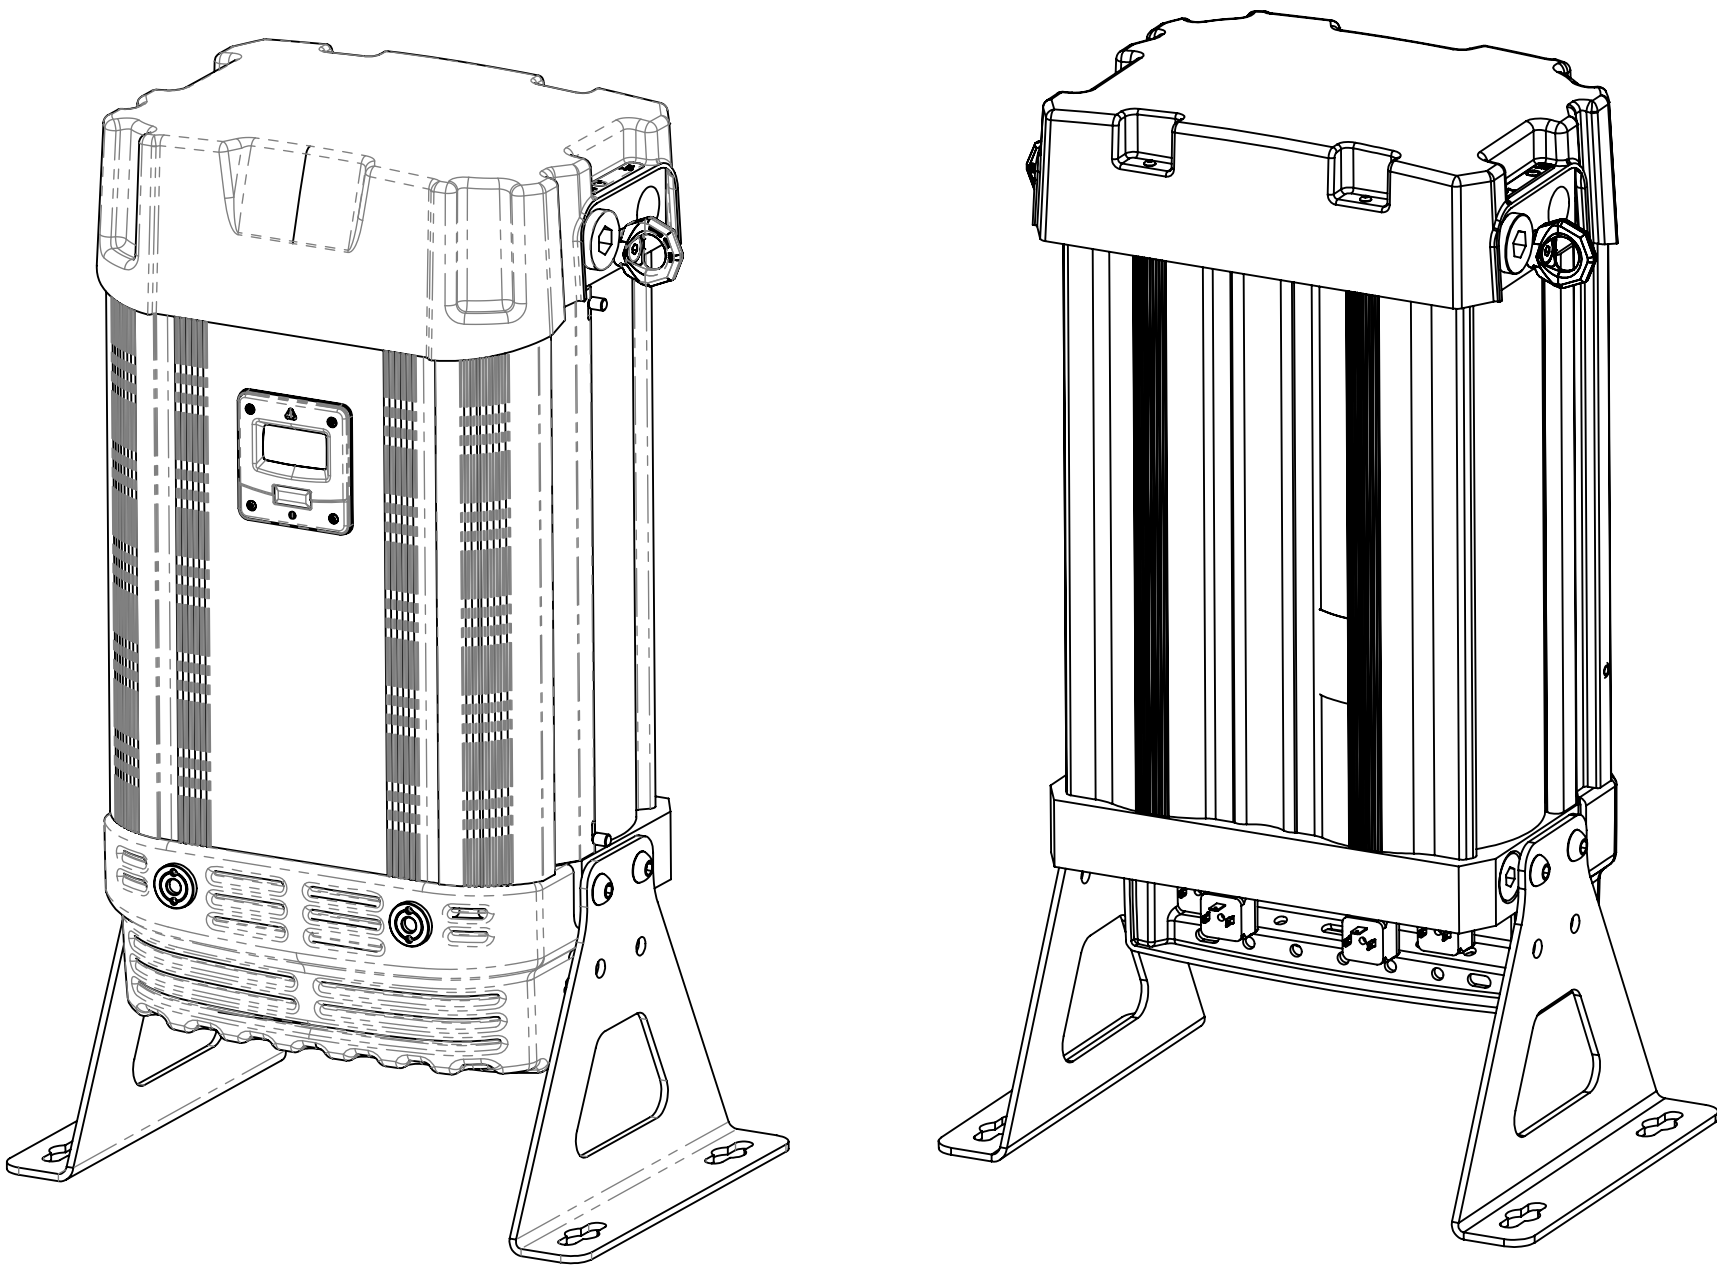MODEL No.	INLET / OUTLET PIPE SIZE	DIMENSION 'A' mm (in)	DIMENSION 'B' mm (in)	APPROX WEIGHT kg (lbs)
NDC-900	1" NPT	734 (29.9)	670 (26.4)	40 (88)
NDC-1200	1" NPT	734 (29.9)	670 (26.4)	40 (88)



PICTORIAL VIEW

SPECIFICATION	
ISO 8573 - 1: 2001 QUALITY CLASSES	Class 2: Water: -70°C (-94°F) PDP Class 2: Dirt: 1µm   CO2: < 1 ppm
MINIMUM WORKING PRESSURE	58 psig (4 barg)
MAXIMUM WORKING PRESSURE	218 psig (15 barg)
POWER SUPPLY	100 - 240V AC / 50 - 60 Hz
MINIMUM INLET TEMPERATURE	35°F (1.5°C)
RATED INLET CONDITION	70°F (21 °C), 375 ppm CO2

	DRAWN	CHECKED	APPROVED
NAME:	IC	ME	ME
DATE:	26-06-13	26-06-13	26-06-13
<div>nano-porous solutions Ltd</div> <div>www.n-psl.com</div>			
<div>© NANO-POROUS SOLUTIONS LTD 2013.</div> <div>THE ORIGINAL OF THIS DRAWING IS COPYRIGHT AND CONTAINS CONFIDENTIAL INFORMATION.</div> <div>IT IS THE PROPERTY OF NANO POROUS SOLUTIONS LTD WITHOUT WHOSE PERMISSION IT MAY NOT BE COPIED, SHOWN OR HANDED TO A THIRD PARTY OR OTHERWISE USED AND IT IS TO BE RETURNED PROMPTLY UPON REQUEST TO NANO POROUS SOLUTIONS LTD.</div>			
SCALE: DO NOT SCALE DRAWING	 3RD ANGLE		SHEET 1 OF 1
MATERIAL: SEE COMPONENT DRAWINGS	REVISION: C-00		
TITLE: NORTH AMERICAN / CANADA CO2 ADSORPTION DRYER (NDC-900 - NDC-1200)			
DRAWING NO.	PD-0018		A2