

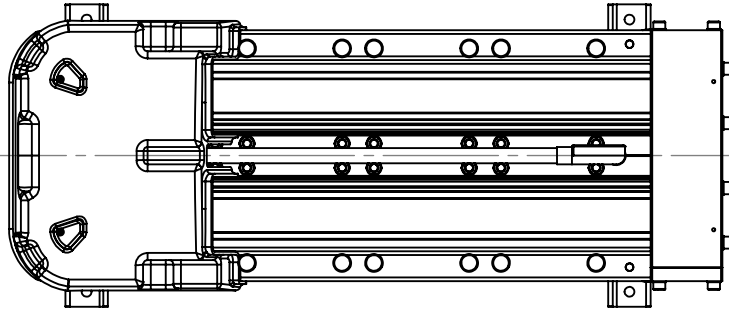
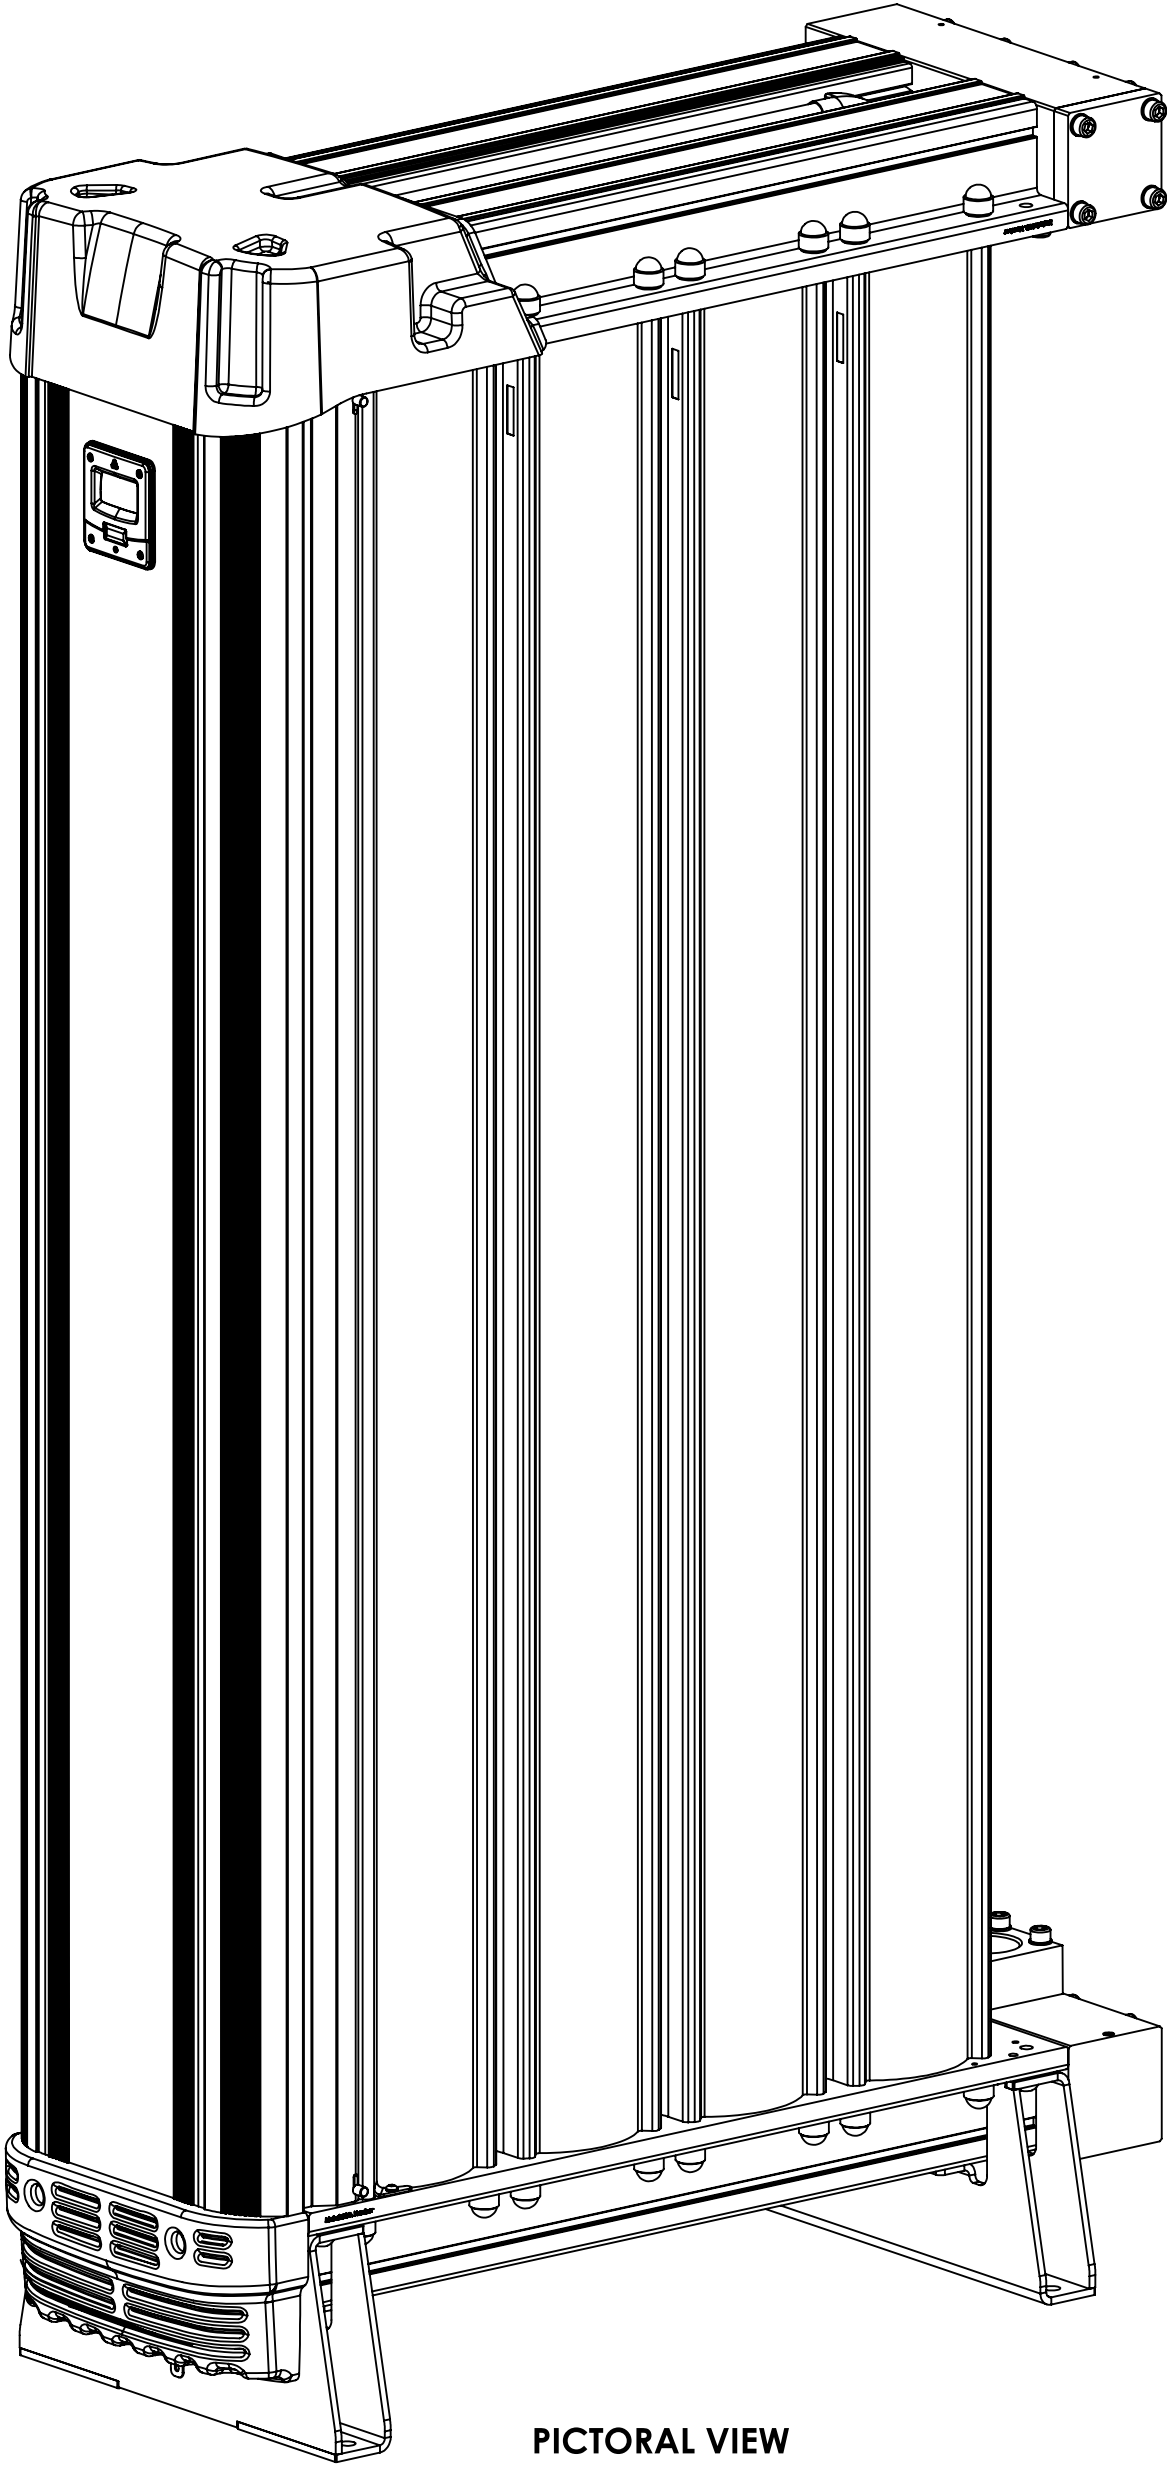
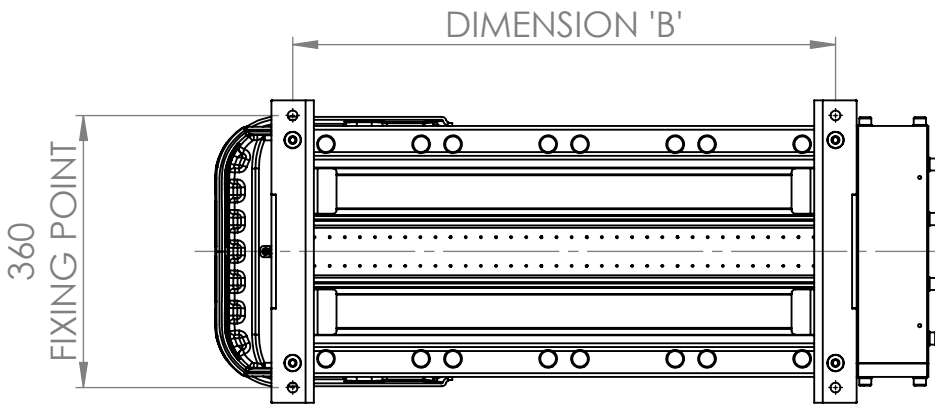


MODEL	DIMENSION "A"/mm	DIMENSION "B"/mm	DIMENSION "C"/mm	APPROX WEIGHT/ KG
NBA-2110	1211	382	678	207
NBA-2120	1461	382	678	238
NBA-3120	1461	550	781	340
NBA-4120	1461	718	949	440
NBA-6120	1461	1054	1285	600

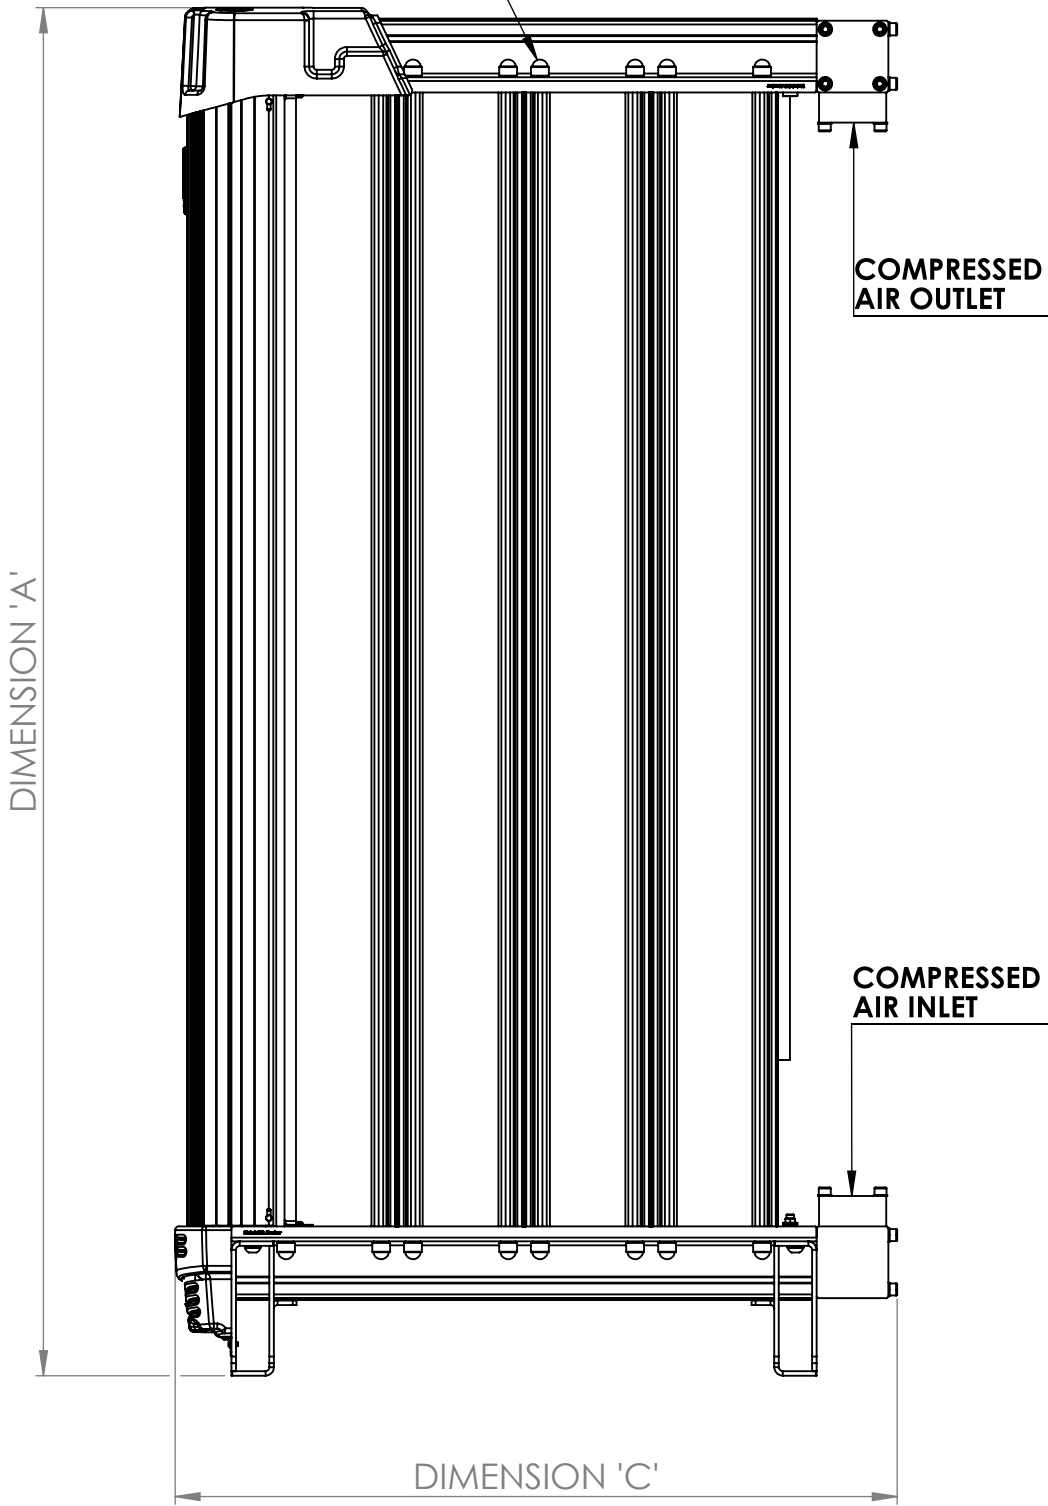

NOTE: FIXING BOLT
SPECIFICATION
CONFORMS TO
SA-193 B7

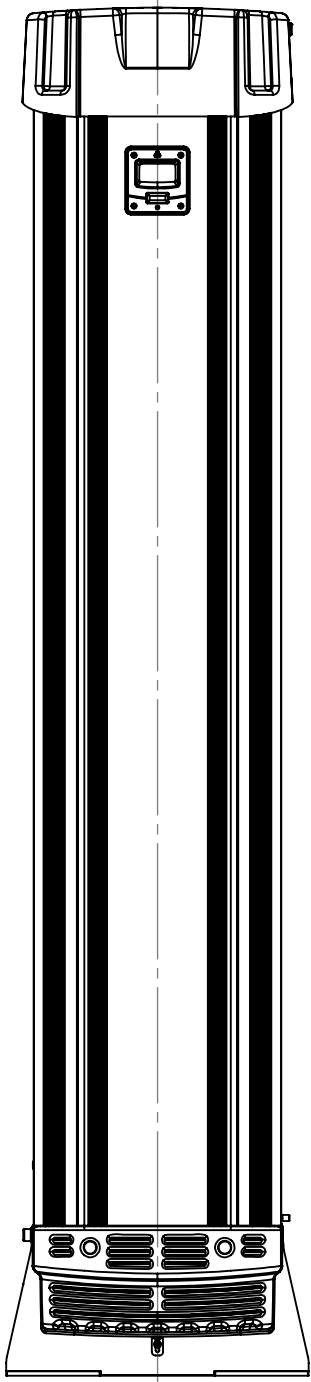

PICTORAL VIEW

SPECIFICATION

CARBON MONOXIDE < 5 PPM
CARBON DIOXIDE < 500 PPM
OIL MIST 0.01 mg/m3
WATER BETTER THAN -40°PDP
NITROGEN OXIDES (NO+NO2) <2 PPM
SULPHUR DIOXIDE <1 PPM

MINIMUM WORKING PRESSURE

58 PSI G (4 BAR G)

MAXIMUM WORKING PRESSURE

145 PSI G (10 BAR G)

POWER SUPPLY

100 - 240 V AC / 50 - 60 Hz

MINIMUM INLET TEMPERATURE

35°F (1.5°C)

MAXIMUM INLET TEMPERATURE

104°F (40°C)

PRESSURE VESSEL DESIGN PRESSURE

218 PSI G (15 BAR G)

GENERAL TOLERANCES UNLESS OTHERWISE STATED:
X ± 0.5mm | X.X ± 0.25mm | X.XX ± 0.1mm
ANGLES ± 0.5°

	DRAWN	CHECKED	APPROVED
NAME	IC	ME	ME
DATE	26-06-13	26-06-13	26-06-13
nano-porous solutions limited www.n-psl.com			

© NANO POROUS SOLUTIONS LTD. 2013. THE ORIGINAL OF THIS DRAWING IS COPYRIGHTED. CONFIDENTIAL INFORMATION. IT IS THE PROPERTY OF NANO POROUS SOLUTIONS LTD. NOT BE COPIED, REPRODUCED, LOANED, RENTED, COPIED, REPRODUC			
--	--	--	--