All materials supplied are in compliance with the requirements of the List of Prohibited Substances

△2

NED 160LC						
ProductNr	ItemNr	Model	Power Supply	Inlet A	Inlet B	Inlet C
8102 0482 51	4001 1652 51	NED 160LC B12 230V	240V AC	G 1/2" F	G 3/4" M	G 1/2" F
8102 0482 52	4001 1652 52	NED 160LC N12 115V	115V AC	NPT R1/2" F	-	NPT R1/2" F
8102 0482 53	4001 1652 53	NED 160LC B12 24Vac	24V AC	G 1/2" F	G 3/4" M	G 1/2" F
8102 0482 54	4001 1652 54	NED 160LC B12 24Vdc	24V DC	G 1/2" F	G 3/4" M	G 1/2" F

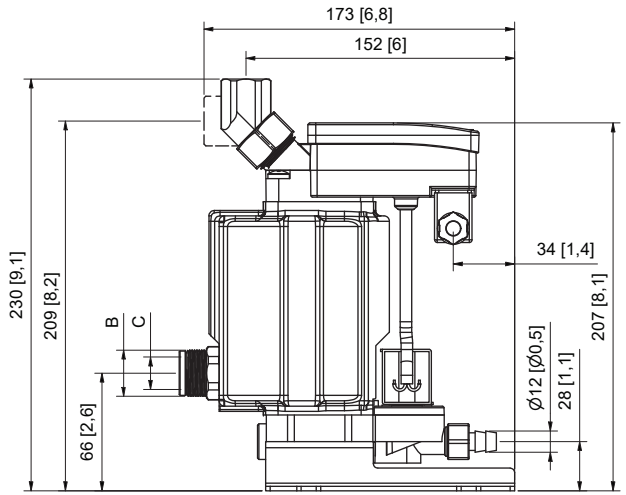

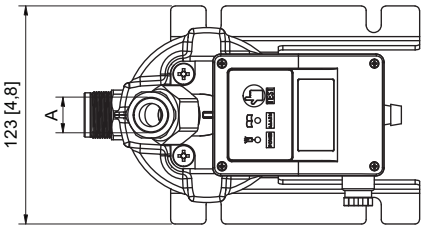

PRESSURE EQUIPMENT PART Designed, built, tested, certified and marked according to	
European Directive PED 2014/68/EU and its amendments	Art. 4.3
UK Pressure Equipment (Safety) Regulation 2016 S.I. 2016/1105	Regulation 8
Medium	AIR/WATER
Design pressure	16 bar
Min. design temperature	+1 °C
Max. design temperature	+60 °C
Nominal diameter (DN)	15
Volume	0,45 L
Test pressure	24 bar
Testing according to SQA-plan : Sample test:	X
100% test:	

Tolerances, if not indicated, according to:							
STANDARD CLASS							
Name	DRAIN ELECTRONIC				NED 160LC	Confidentiality Class acc. to 1102 K	
Material	Not Applicable					Confidential	
Treatment	Untreated					INV	
nano STATUS	Scale 1 : 2	Family		A2	Compare		Drawing owner
	Drawn by AIR15392	Blank nr.			Replaces		API
	Version Drwg	Blank wt	Kg	Fini wt.	1,800 kg	Designation	Sheet 1 / 1
Released	Des checked.	Prod checked.	Approved.	Date	7/06/2022	4001165250-01	

2		Drain naming160LC was 300LC	23/08/2022	User Agent
Ed	Posi-tion	Modified from	Date	Intr./Appd.

4001165450-M1	
Parent 3D model	Ed . Version 3D

CONFIDENTIAL:
This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.