All materials supplied are in compliance with the requirements of the List of Prohibited Substances

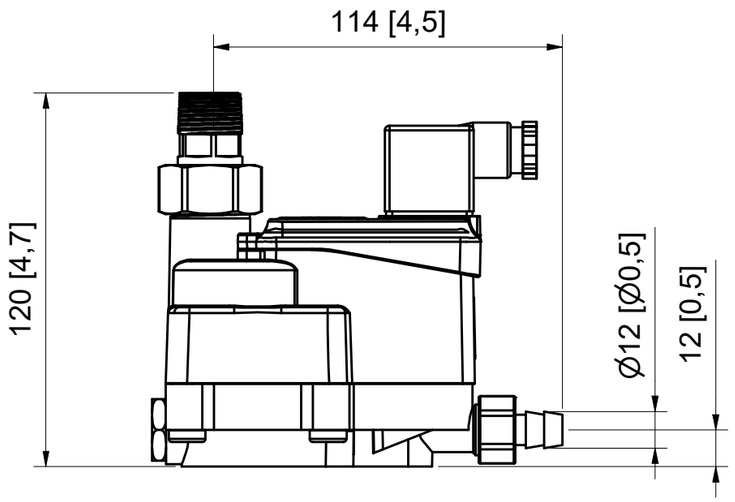

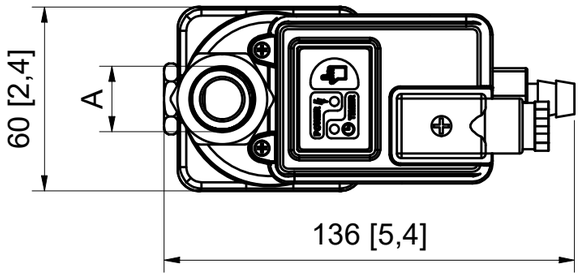

PRESSURE EQUIPMENT PART Designed, built, tested, certified and marked according to	
European Directive PED 2014/68/EU and its amendments	Art. 4.3
UK Pressure Equipment (Safety) Regulation 2016 S.I. 2016/1105	Regulation 8
Medium	AIR/WATER
Design pressure	16 bar
Min. design temperature	+1 °C
Max. design temperature	+60 °C
Nominal diameter (DN)	15
Volume	0,06 L
Test pressure	24 bar
Testing according to SQA-plan :	Sample test: X 100% test:

△3

NED 4L

ProductNr	ItemNr	Model	Power Supply	Inlet A
8102 0482 01	4001 1652 01	NED 4L B12 230V	240V AC	R 1/2" M
8102 0482 02	4001 1652 02	NED 4L N12 115V	115V AC	NPT R1/2" M
8102 0482 03	4001 1652 03	NED 4L B12 24Vac	24V AC	R 1/2" M
8102 0482 04	4001 1652 04	NED 4L B12 24Vdc	24V DC	R 1/2" M

Tolerances, if not indicated, according to:				
STANDARD CLASS				

Name	DRAIN ELECTRONIC				NED 4L	Confidentiality Class acc. to 1102 K
Material	Not Applicable					Confidential
Treatment	Untreated					INV
STATUS	Scale 1 : 2	Family		A3	Compare	Drawing owner
	Drawn by AIR15392	Blank nr.			Replaces	API
Released	Version Drwg	Blank wt	Kg	Fini wt. 0,400 kg	Designation	Sheet 1 / 1
	Des checked.	Prod checked.	Approved.	Date 9/05/2022	4001165200-01	

Ed	Position	Modified from	Date	Intr./Appd.	Parent 3D model	Ed . Version 3D
3		Drain naming changed from 2L to 4L	20/09/2022	User Agent	4001165400-M1	N/A

CONFIDENTIAL:
This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.