

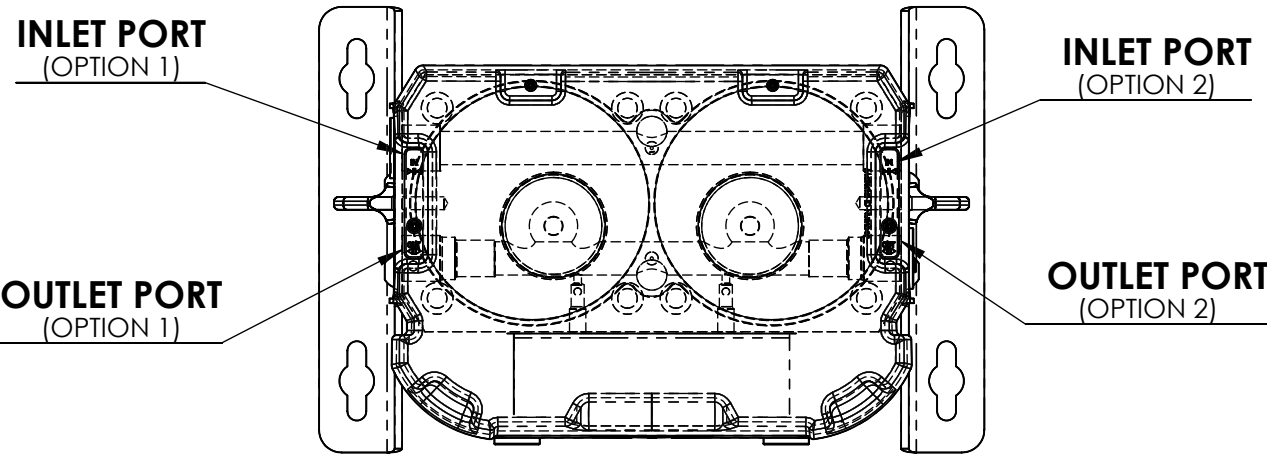
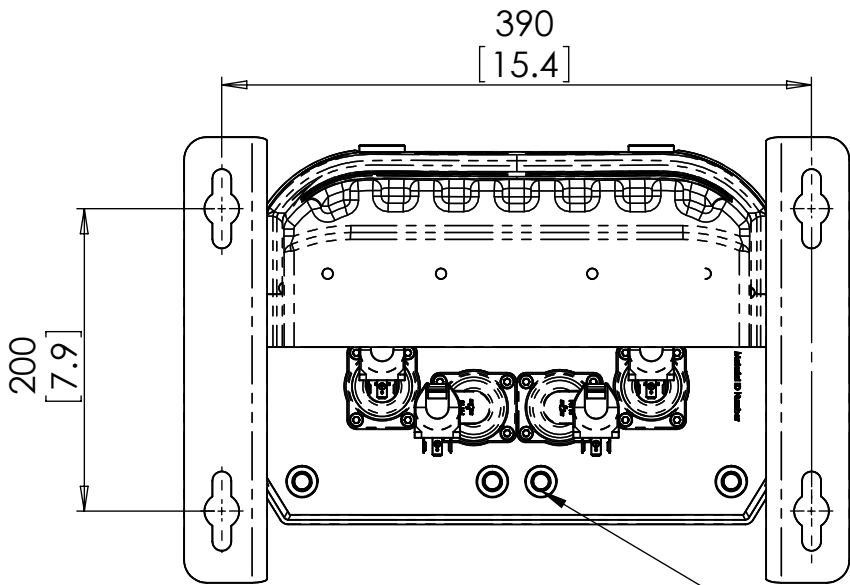



INLET / OUTLET CONNECTIONS

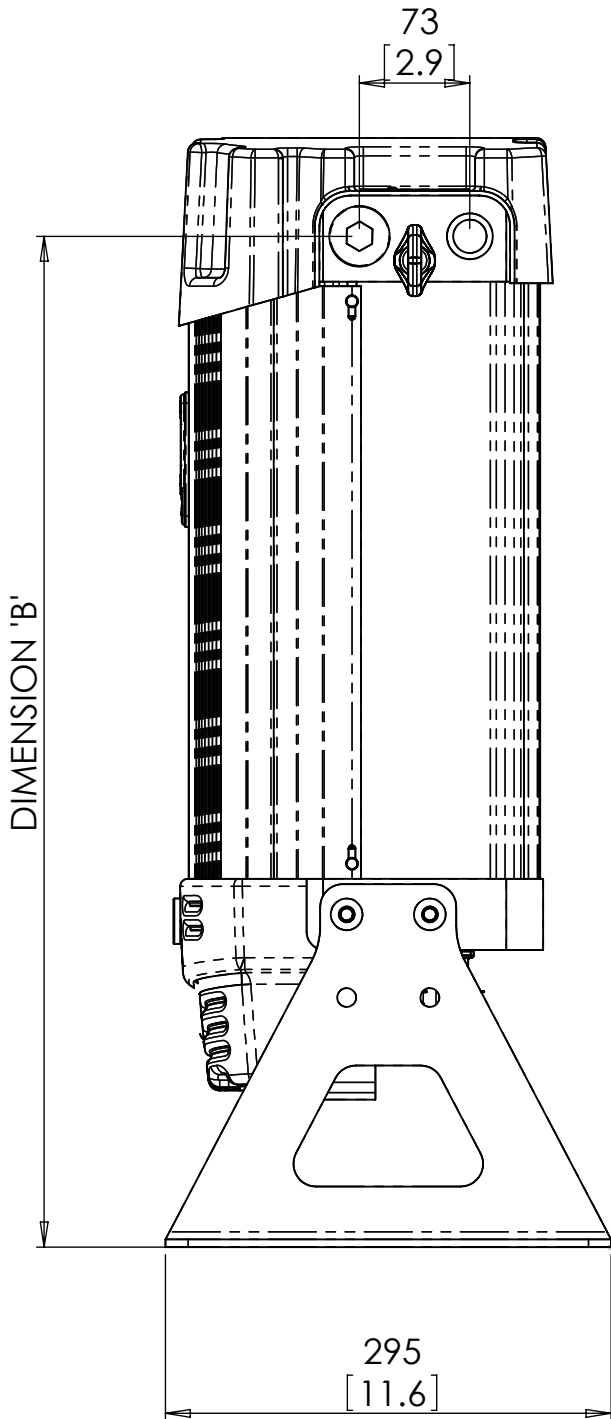

LIFTING EYES TO BE
REMOVED PRIOR TO PIPING
UP AND OPERATION
(M10 LIFTING EYES NOT SUPPLIED)

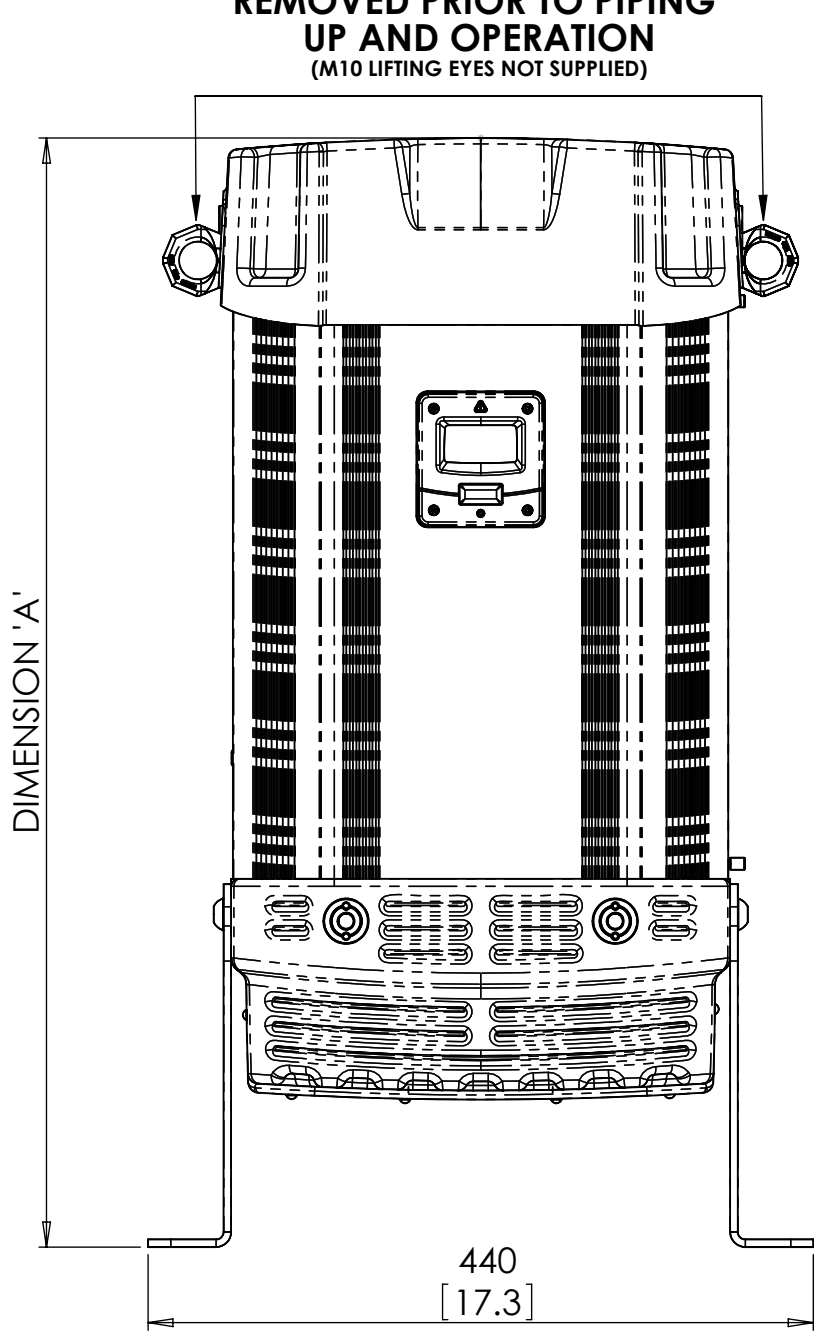

MODEL No.	INLET / OUTLET PIPE SIZE	DIMENSION 'A' mm (in)	DIMENSION 'B' mm (in)	APPROX WEIGHT kg (lbs)
NDC-900	1" NPT	734 (29.9)	670 (26.4)	40 (88)
NDC-1200	1" NPT	734 (29.9)	670 (26.4)	40 (88)

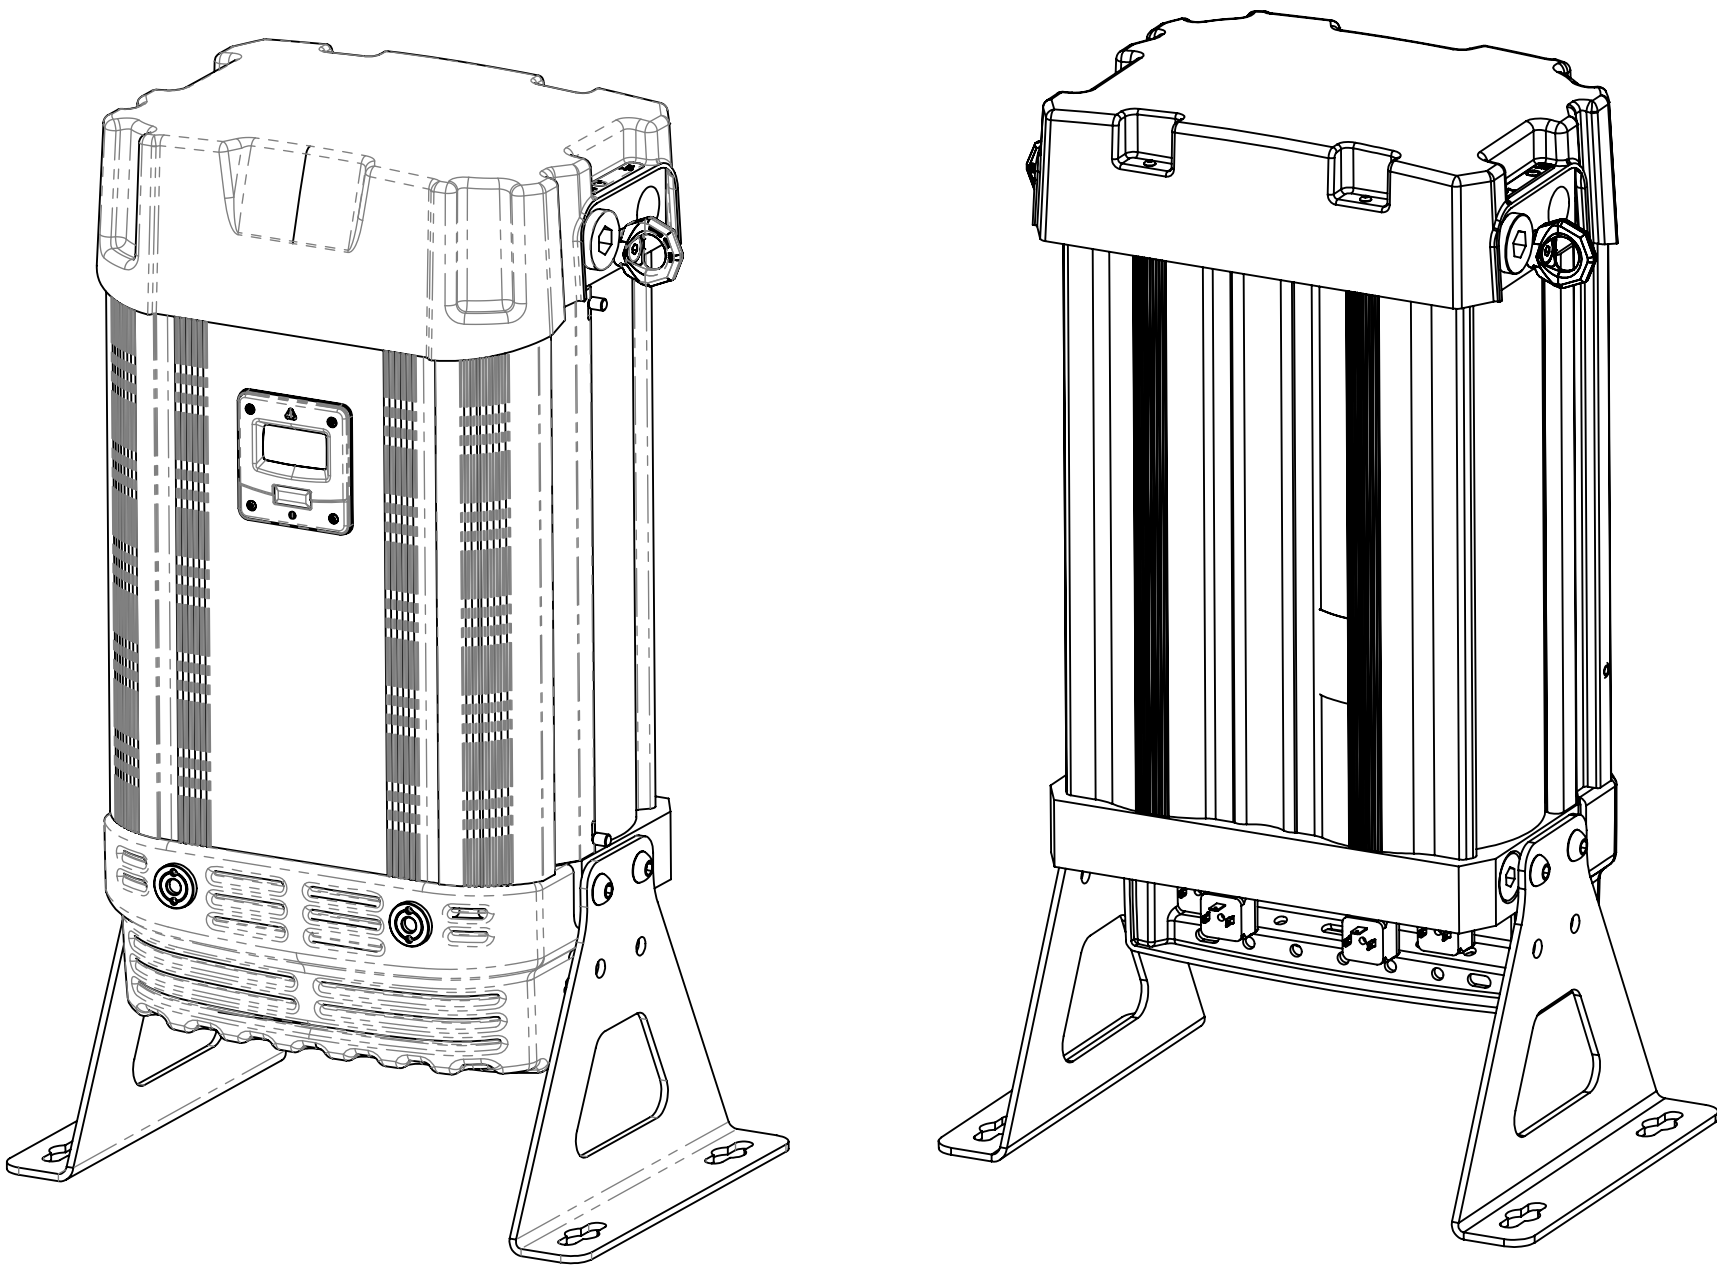

PICTORIAL VIEW

SPECIFICATION	
ISO 8573 - 1: 2001 QUALITY CLASSES	Class 2: Water: -70°C (-94°F) PDP Class 2: Dirt: 1µm CO2: < 1 ppm
MINIMUM WORKING PRESSURE	58 psig (4 barg)
MAXIMUM WORKING PRESSURE	218 psig (15 barg)
POWER SUPPLY	100 - 240V AC / 50 - 60 Hz
MINIMUM INLET TEMPERATURE	35°F (1.5°C)
RATED INLET CONDITION	70°F (21 °C), 375 ppm CO2

	DRAWN	CHECKED	APPROVED
NAME:	IC	ME	ME
DATE:	26-06-13	26-06-13	26-06-13
nano-porous solutions Ltd www.n-psl.com			
© NANO-POROUS SOLUTIONS LTD 2013. THE ORIGINAL OF THIS DRAWING IS COPYRIGHT AND CONTAINS CONFIDENTIAL INFORMATION. IT IS THE PROPERTY OF NANO POROUS SOLUTIONS LTD WITHOUT WHOSE PERMISSION IT MAY NOT BE COPIED, SHOWN OR HANDED TO A THIRD PARTY OR OTHERWISE USED AND IT IS TO BE RETURNED PROMPTLY UPON REQUEST TO NANO POROUS SOLUTIONS LTD.			
SCALE: DO NOT SCALE DRAWING	 3RD ANGLE		SHEET 1 OF 1
MATERIAL: SEE COMPONENT DRAWINGS	REVISION: C-00		
TITLE: NORTH AMERICAN / CANADA CO2 ADSORPTION DRYER (NDC-900 - NDC-1200)			
DRAWING NO.	PD-0018		A2