


NED 16LC

ProductNr	ItemNr	Model	Power Supply	Inlet A	Inlet B	Inlet C
8102 0482 31	4001 1652 31	NED 16LC B12 230V	240V AC	G 1/2" F	G 3/4" M	G 1/2" F
8102 0482 32	4001 1652 32	NED 16LC N12 115V	115V AC	NPT R1/2" F	-	NPT R1/2" F
8102 0482 33	4001 1652 33	NED 16LC B12 24Vac	24V AC	G 1/2" F	G 3/4" M	G 1/2" F
8102 0482 34	4001 1652 34	NED 16LC B12 24Vdc	24V DC	G 1/2" F	G 3/4" M	G 1/2" F

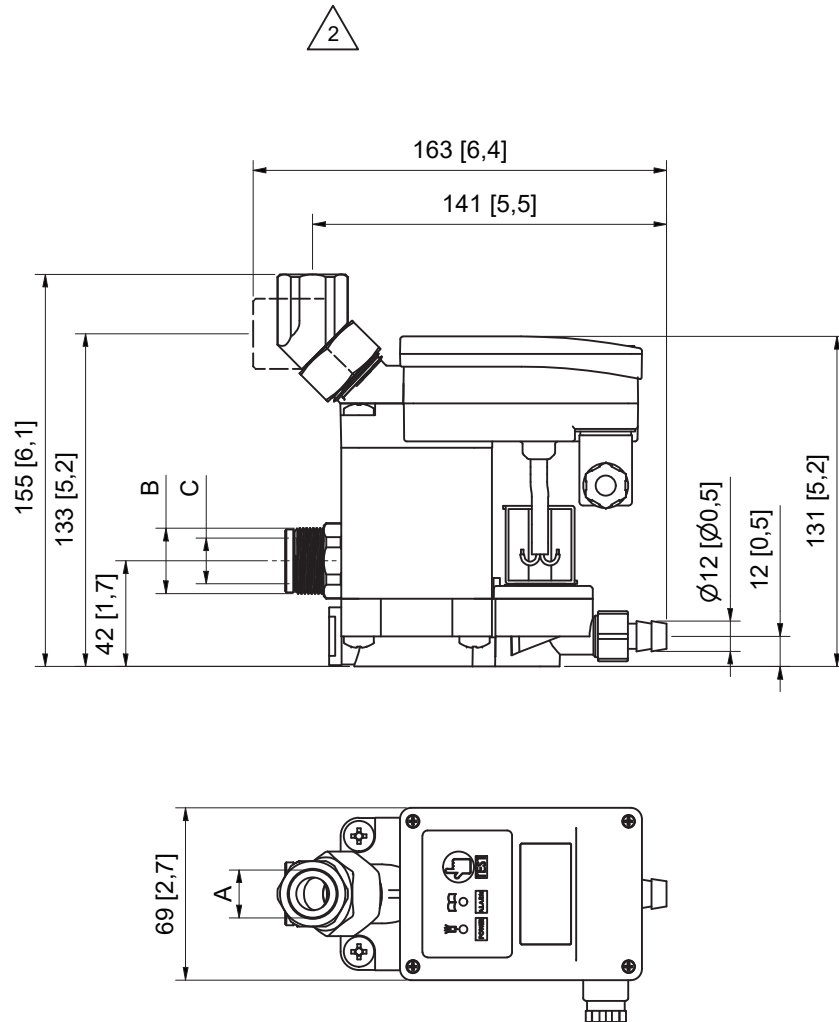

PRESSURE EQUIPMENT PART Designed, built, tested, certified and marked according to	
European Directive PED 2014/68/EU and its amendments	Art. 4.3
UK Pressure Equipment (Safety) Regulation 2016 S.I. 2016/1105	Regulation 8
Medium	AIR/WATER
Design pressure	16 bar
Min. design temperature	+1 °C
Max. design temperature	+60 °C
Nominal diameter (DN)	15
Volume	0,11 L
Test pressure	24 bar
Testing according to SQA-plan :	Sample test: X 100% test:

Tolerances, if not indicated, according to:					
STANDARD CLASS					
Name	DRAIN ELECTRONIC		NED 16LC		Confidentiality Class acc. to 1102 K
Material	Not Applicable				Confidential
Treatment	Untreated				INV
	Scale	1 : 2	Family	A3	Compare
	Drawn by	AIR15392	Blank nr.		Replaces
STATUS		Blank wt	Kg	Fin. wt.	0,700 kg
Des checked.		Prod checked.	Approved.	Date	7/06/2022
Released		Designation		4001165230-01	
				Sheet 1 / 1	
				Drawing owner API	

2		Drain naming 16L was 40L	23/08/2022	User Agent	4001165430-M1	
Ed	Position	Modified from	Date	Intr./Appd.	Parent 3D model	Ed . Version 3D